

Project _____
 Schedule _____ Date _____
 Notes _____

DESCRIPTION

naturalLED[®] security wall lighting are suitable for wet locations with ratings of IP65. Built-in dusk to dawn photocell sensor, with easy on/off plug if sensor is not in use. Easy installation, gasketing between back plate and front prevents entry of water. Polyester powder-coated finish, rust and corrosion proof, maintenance free throughout the years of usage.



FEATURES


- DLC Premium
- For Wet Location
- IP65 Rating
- UL Rated
- Build-in Photocell Sensor (Turn On and Off)
- Input line Voltage: 120-277V
- Voltage Frequency: 50/60
- Input Current: 0.13A / 0.23A
- Power Factor: >0.9
- Beam Angle: 100°
- Operating Temperature: -4°F~113°F
- Recommended 8 foot height performance
- Material: Aluminum housing with PC lens
- 50,000 rated life hours

APPLICATIONS

- Security Lighting
- Pathway Lighting
- Perimeter Lighting
- Area Lighting
- Wall Lighting

WARRANTY

- 5 Year Warranty

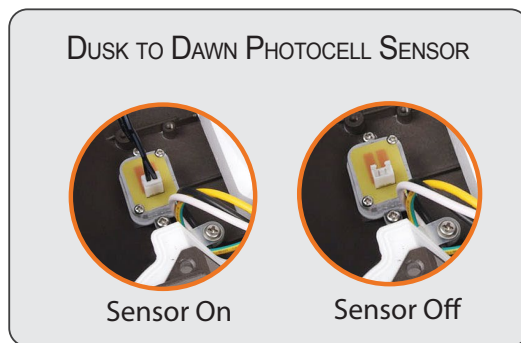


Ordering Information		EXAMPLE: FXSECW15/840/DB/MV			
FX	SECW	15	840	DB	MV
Category	Series	Wattage	CRI /Color Temp	Color	Voltage
FX Fixture	SECW Security Wall Lights	15 15W	8 CRI 80 40K 4000K	DB Dark Bronze	MV Multiple Voltage

ORDERING

*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	Color Temp (K)	Lumens (lm)	Equiv. Wattage (W)	Voltage	Rated Hrs	IP65 Rated	DLC (S/P)
15	9410	FXSECW15/840/DB/MV	4000K	1,931	70W	120-277V	50,000	•	P
15	9411	FXSECW15/850/DB/MV	5000K	1,954	70W	120-277V	50,000	•	P
28	9412	FXSECW30/840/DB/MV	4000K	3,372	100W	120-277V	50,000	•	P
28	9413	FXSECW30/850/DB/MV	5000K	3,437	100W	120-277V	50,000	•	P


SPECIFICATIONS

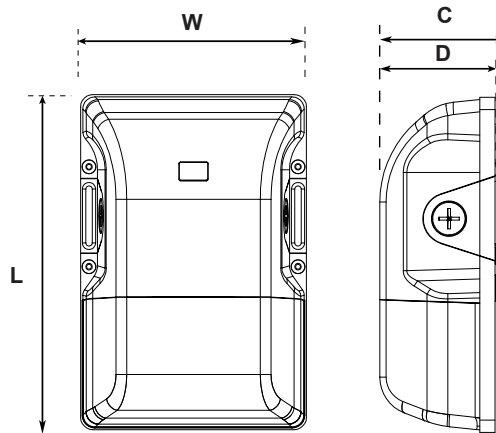

Wattage	Width (W)	Length (L)	(C)	(D)	Weight
15	5.8" (147mm)	8.6" (218mm)	3.1" (78mm)	3.0" (75mm)	1.98-lb
28	5.8" (147mm)	8.6" (218mm)	3.1" (78mm)	3.0" (75mm)	1.98-lb

PHOTOMETRICS CHART


SECW15 (15 Watt)

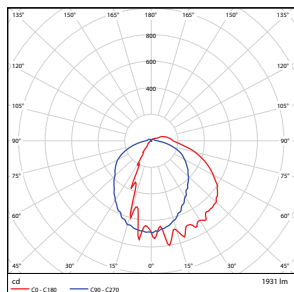

Center Beam fc	Beam Width
15.4 fc	13.3 ft 14.0 ft
3.91 fc	26.4 ft 27.9 ft
1.73 fc	39.7 ft 41.9 ft
0.97 fc	53.0 ft 56.0 ft
0.62 fc	66.1 ft 69.8 ft
0.43 fc	79.4 ft 83.9 ft

Vert. Spread: 89.5°
Horiz. Spread: 92.7°

SECW30 (28 Watt)

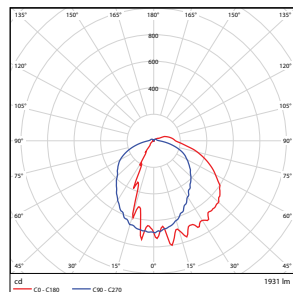

Center Beam fc	Beam Width
29.0 fc	14.4 ft 16.5 ft
7.36 fc	28.6 ft 32.8 ft
3.26 fc	43.0 ft 49.3 ft
1.83 fc	57.5 ft 65.8 ft
1.17 fc	71.7 ft 82.1 ft
0.81 fc	86.1 ft 98.6 ft

Vert. Spread: 94.2°
Horiz. Spread: 101.9°

PACKAGE

Master Pack: 10 pcs

