

Project _____

Schedule _____

Date _____

Notes _____

DESCRIPTION

naturaLED® Wall Lights come in 10-watt, 20-watt and 25-watts to replace your existing incandescent up to 200-watt, saving up to 90% of energy. Super energy efficient and lasts up to 50,000+ hours average life. naturaLED® wall lights are an ideal lighting solution for security lights, both residential, commercial and many other outdoor applications.



FEATURES

- Energy Star Qualified
- UL Wet
- Up to 80% energy savings
- Instant on
- Light weight
- Contains no mercury or lead
- 50,000 hrs rated average life
- Input line voltage: 120V, 120-277V
- Power Factor: >0.9
- THD: <20%
- Beam Angle: Flood
- Operating temperature: -22°F - 122°F
- Finish: Black / White / Nickel

APPLICATIONS





- Security Lighting
- Accent Lighting
- Residential Lighting
- Outdoor Lighting
- Wall Lighting

WARRANTY

- 5 Year Warranty

Ordering Information		EXAMPLE: LED-FX5DWS25/33S/930/BK				
LED	FX5	DWS	25	33S	930	BK
LED	Category FX Fixture	Style DWS Down Wall Sconce	Wattage 25 25 Watts	Beam Angle 33 33°	CRI/ Color Temp 8 CRI80 9 CRI90 30 3000K 50 5000K	Color Finish BK Black NI Nickel WH White


ORDERING

Watts (W)	Ordering Code	Description	Color Temp (K)	Lumens (lm)	Equiv. Wattage (W)	Style	Beam Angle	Color	Voltage	Wet	ES
 Up/Down Wall Sconce (Black)											
10	7026	LED-FXDWS10/830/BK	3000K	700	90	Up/down Wall Sconce	38°	Black	120V	•	•
10	7027	LED-FXDWS10/850/BK	5000K	700	90	Up/down Wall Sconce	38°	Black	120V	•	•
20	7064	LED-FXDWS20/830/BK	3000K	1,400	200	Up/down Wall Sconce	38°	Black	120V	•	•
20	7065	LED-FXDWS20/850/BK	5000K	1,400	200	Up/down Wall Sconce	38°	Black	120V	•	•
 Up/Down Wall Sconce (White)											
10	7068	LED-FXDWS10/830/WH	3000K	700	90	Up/down Wall Sconce	38°	White	120V	•	•
10	7069	LED-FXDWS10/850/WH	5000K	700	90	Up/down Wall Sconce	38°	White	120V	•	•
20	7070	LED-FXDWS20/830/WH	3000K	1,400	200	Up/down Wall Sconce	38°	White	120V	•	•
20	7071	LED-FXDWS20/850/WH	5000K	1,400	200	Up/down Wall Sconce	38°	White	120V	•	•
 Up/Down Wall Sconce (Nickel)											
10	7022	LED-FXDWS10/830/NI	3000K	700	90	Up/down Wall Sconce	38°	Nickel	120V	•	•
20	7023	LED-FXDWS20/830/NI	3000K	1,400	200	Up/down Wall Sconce	38°	Nickel	120V	•	•
 Wall Sconce (Black)											
25	7792	LED-FX5DWS25/33S/930/BK	3000K	1,750	100	Wall Sconce	33°	Black	120-277V	•	•

■ SPECIFICATIONS


FXDWS - 10W

Weight: 1.54-lbs

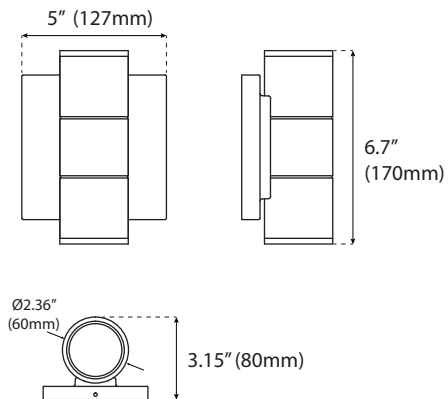


FXDWS - 20W

Weight: 2.43-lbs

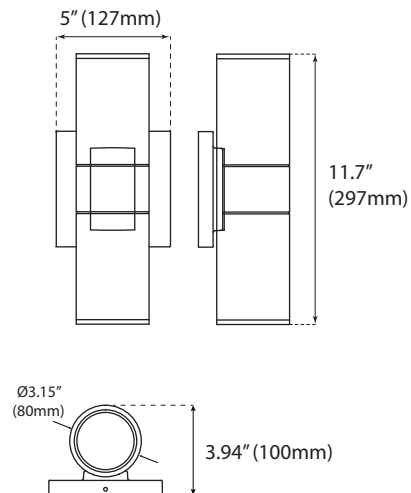


FX5DWS - 25W

Weight: 3.75-lbs

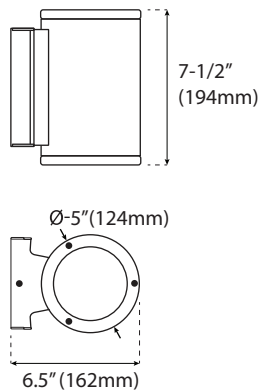

PHOTOMETRICS CHART


DWS - up/down Wall Sconce (10W)

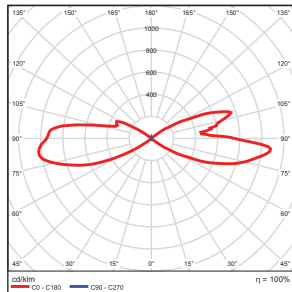

Center Beam fc	Beam Width	
	Center Beam fc	Beam Width
2.5R	0.87 fc	1.2 ft 1.9 ft
5.0R	0.22 fc	2.3 ft 3.8 ft
7.5R	0.10 fc	3.5 ft 5.6 ft
10.0R	0.05 fc	4.7 ft 7.5 ft
12.5R	0.03 fc	5.8 ft 9.4 ft
15.0R	0.02 fc	7.0 ft 11.3 ft

■ Vert. Spread: 26.2°
■ Horiz. Spread: 41.2°


DWS - up/down Wall Sconce (20 Watt)

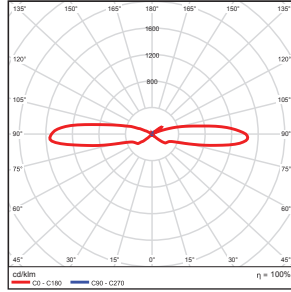

Center Beam fc	Beam Width	
	Center Beam fc	Beam Width
2.5R	2.02 fc	1.0 ft 1.3 ft
5.0R	0.51 fc	2.1 ft 2.5 ft
7.5R	0.22 fc	3.1 ft 3.8 ft
10.0R	0.13 fc	4.1 ft 5.0 ft
12.5R	0.08 fc	5.2 ft 6.3 ft
15.0R	0.06 fc	6.2 ft 7.5 ft

■ Vert. Spread: 23.3°
■ Horiz. Spread: 28.2°

5DWS - Wall Sconce (25 Watt)

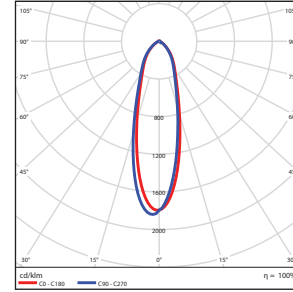


Center Beam fc	Beam Width	
	Center Beam fc	Beam Width
2.5R	453 fc	1.4 ft 1.4 ft
5.0R	113 fc	2.8 ft 2.8 ft
7.5R	50.3 fc	4.2 ft 4.2 ft
10.0R	28.3 fc	5.5 ft 5.6 ft
12.5R	18.1 fc	6.9 ft 7.0 ft
15.0R	12.6 fc	8.3 ft 8.4 ft


■ Vert. Spread: 31.0°
■ Horiz. Spread: 31.1°

PACKAGE

Master Pack: 10 pcs
For Up/Down Wall Sconce 10W

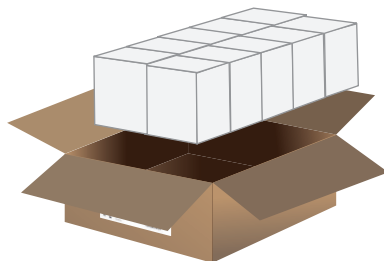

Master Pack: 5 pcs
For Up/Down Wall Sconce 20W

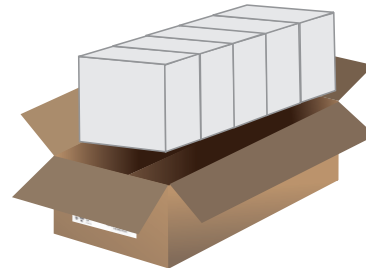

Master Pack: 4 pcs
For Wall Sconce 25W

