

# Technical Information Bulletin


## Ballast



Date: \_\_\_\_\_ Name of distributor: \_\_\_\_\_  
 In hands date of project: \_\_\_\_\_ Client #: \_\_\_\_\_  
 Project name/Number: \_\_\_\_\_ Name of end user: \_\_\_\_\_

### ORDERING INFORMATION

Order code: 66753  
 Description: E240T12RS120/N  
 UPC: 69549667532



### SPECIFICATIONS

**Ballast type:** Electronic  
**Starting method:** Rapid Start  
**Lamp connection:** Series  
**Input voltage (V):** 120  
**Input frequency (Hz):** 50/60  
**Max. case temperature:** 75 °C  
**Thermal protection:** Class P

**Type:** 1 Outdoor  
**Contains PCBs:** No  
**Sound rating:** A  
**Open current voltage (OCV) (V):** 450  
**Inherent thermal protection:** Yes  
**ICES-005 Compliant:** Class A GDLE  
**Auto-restrike:** Yes  
 CAN/CSA C654-14 Efficacy Verified



Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD (%)	Power factor	Max. lamp current crest factor	B. E. F.
F40W T12	2	40	0/-18	0.66	67	0.86	10	0.99	1.7	1.28
F40W T12	1	40	0/-18	0.34	40	0.88	15	0.98	1.7	2.20
F34W T12	2	34	50/10	0.52	61	0.86	10	0.99	1.7	1.41
F34W T12	1	34	50/10	0.31	37	0.88	15	0.97	1.7	2.38
F30W T12	2	30	0/-18	0.50	59	0.85	10	0.98	1.7	1.44
F30W T12	1	30	0/-18	0.30	35	0.95	15	0.97	1.7	2.71
F40W T12 ES	2	25	50/10	0.66	78	1.40	10	0.99	1.6	1.79

#### WARRANTY:

Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C.

For more information visit our website.

This lighting equipment complies with Canadian standard ICES-005.

Data is based upon tests performed in a controlled environment and representative of relative performance.

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.


# Technical Information Bulletin

## Ballast



**ORDER CODE: 66753**

### WIRING DIAGRAM

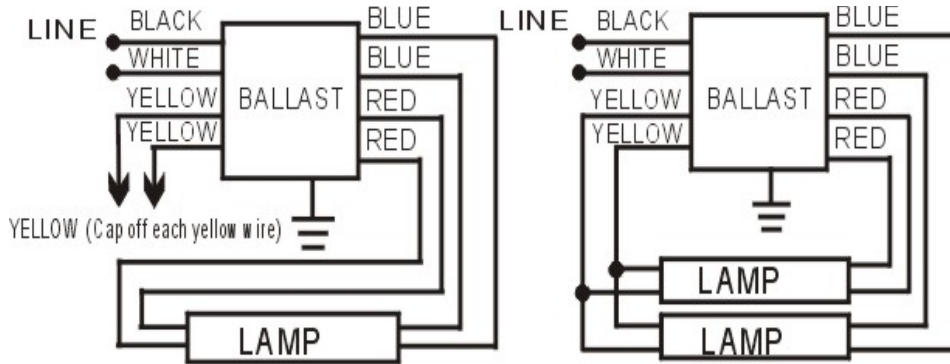


### LEADS LENGTH

Black	18.8" (48 cm)
White	18.8" (48 cm)
Blue	30.9" (78.5 cm)
Red	30.9" (78.5 cm)
Yellow	46.4" (118 cm)

### BALLAST DIMENSIONS

Length (L):	9.50" (24.1 cm)
Width (W):	1.7" (4.3 cm)
Height (H):	1.14" (2.9 cm)
Mounting (M):	8.9" (22.6 cm)

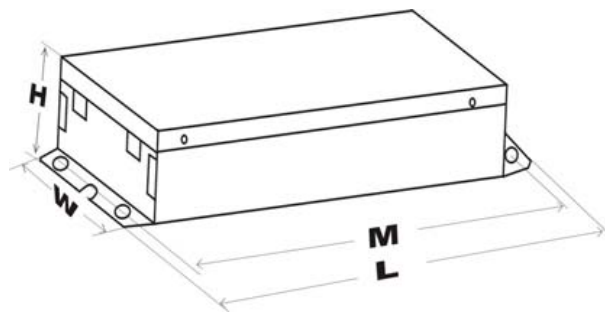

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

This lighting equipment complies with Canadian standard ICES-005.  
 Data is based upon tests performed in a controlled environment and representative of relative performance.  
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.