

Project _____
 Schedule _____ Date _____
 Notes _____

DESCRIPTION

naturalLED[®] (CWP) full cut-off wallpack comes in rugged cast-aluminum housing with excellent thermal design. Our CWP product offers a popular but classic appearance with sleek angle design. Delivering up to 14,667 lumens with different wattages options: 40W, 60W, 80W, 120W. Replacing up to 750-watt metal halide luminaires and provides energy saving up to 72%. Our CWP is ideal for outdoor applications such as carports, loading areas, driveways, parking areas, and pathways. Suggested for wall mounting minimum above four feet from ground.



FEATURES

- DLC Premium
- IP65 rated
- UL/cUL listed
- 15-30 foot height performance
- Die-cast aluminum housing
- Voltage: 120-277V
- Dimmable: 1-10V
- THD<20
- Input current/ Surge Protect Level
 - 40W: 0.34A / 4K
 - 60W: 0.52A / 4K
 - 80W: 0.68A / 4K
 - 120W: 1.00A / 6K
- Power Factor >0.9
- CRI: 70
- Operating temperature: -40°F ~ 122°F
- Rated 50,000 hours average life

ACCESSORY

Button Photocell



Emergency Driver



APPLICATIONS

- Area Lighting
- Security Lighting
- Pathway Lighting
- Perimeter Lighting
- Entryway Lighting

WARRANTY

- 5 Year Warranty

COLOR



Ordering Information		EXAMPLE: LED-FXCWP40/40K/BZ			
LED	FX	CWP	40	40K	BZ
LED	Category FX Fixture	Series CWP Cut Wall Pack	Wattage 40 40W	Color Temp 40K 4000K	Color BZ Bronze

*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	Color Temp (K)	Lumens (lm)	Size	Equiv. Wattage (W)	Rated Hrs	IP65 Rated	DLC (S/P)
40	9319	LED-FXCWP40/40K/BZ	4000K	4,861	9.25"X6.5"	250	50,000	•	P
40	9320	LED-FXCWP40/50K/BZ	5000K	4,861	9.25"X6.5"	250	50,000	•	P
61	9208	LED-FXCWP60/40K/BZ	4000K	7,347	9.25"X6.5"	250-400	50,000	•	P
61	9209	LED-FXCWP60/50K/BZ	5000K	7,482	9.25"X6.5"	250-400	50,000	•	P
80	9443	LED-FXCWP80/40K/BZ	4000K	9,908	9.25"X6.5"	400-575	50,000	•	P
80	9444	LED-FXCWP80/50K/BZ	5000K	9,908	9.25"X6.5"	400-575	50,000	•	P
120	9445	LED-FXCWP120/40K/BZ	4000K	14,667	9.25"x9.6"	400-750	50,000	•	P
120	9446	LED-FXCWP120/50K/BZ	5000K	14,667	9.25"x9.6"	400-750	50,000	•	P

ACCESSORIES

SOLD SEPARATELY

Photocell

- **P10036 SEN-PHO-BT-MT/MV**
(Button Photocell 120-277V)




Emergency Driver

- **7334 BAEM15-48BC/MV-A**
(LED Emergency Backup Driver 120-277V)



SPECIFICATIONS

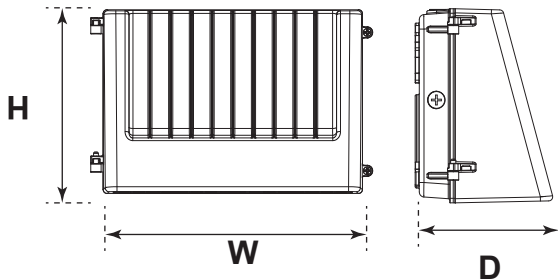


Wattage	Height(H)	Width (W)	Depth (D)	Weight
40W	9.25" (235mm)	14.2" (360mm)	6.5" (166mm)	6.85 lbs
61W	9.25" (235mm)	14.2" (360mm)	6.5" (166mm)	7.05 lbs
80W	9.25" (235mm)	14.2" (360mm)	6.5" (166mm)	7.48 lbs
120W	9.25" (235mm)	14.2" (360mm)	9.6" (245mm)	10.56 lbs

PHOTOMETRICS CHART

PACKAGE Master Pack: 1 pc


40 Watt



Illuminance at a Distance	
Center Beam Fc	Beam Width
5.0ft	56.9 fc 11.1 ft 36.1 ft
10.0ft	14.2 fc 22.3 ft 72.2 ft
15.0ft	9.32 fc 33.4 ft 108.3 ft
20.0ft	6.77 fc 44.6 ft 144.5 ft
25.0ft	5.07 fc 55.7 ft 180.6 ft
30.0ft	4.18 fc 66.8 ft 216.7 ft

■ Vert. Spread: 96.2°
■ Horiz. Spread: 149.0°


61 Watt



Illuminance at a Distance	
Center Beam Fc	Beam Width
5.0ft	85.9 fc 11.1 ft 33.3 ft
10.0ft	21.5 fc 22.2 ft 66.6 ft
15.0ft	14.3 fc 33.3 ft 99.9 ft
20.0ft	10.7 fc 44.3 ft 133.2 ft
25.0ft	8.5 fc 55.4 ft 166.5 ft
30.0ft	7.1 fc 66.5 ft 199.8 ft

■ Vert. Spread: 95.9°
■ Horiz. Spread: 146.6°


80 Watt



Illuminance at a Distance	
Center Beam Fc	Beam Width
5.0ft	115 fc 11.4 ft 44.8 ft
10.0ft	28.7 fc 22.7 ft 89.6 ft
15.0ft	19.1 fc 34.1 ft 134.4 ft
20.0ft	14.2 fc 45.3 ft 179.2 ft
25.0ft	11.4 fc 56.8 ft 224.0 ft
30.0ft	9.5 fc 68.2 ft 268.8 ft

■ Vert. Spread: 97.3°
■ Horiz. Spread: 154.8°

120 Watt



Illuminance at a Distance	
Center Beam Fc	Beam Width
5.0ft	160 fc 11.3 ft 41.4 ft
10.0ft	40.0 fc 22.6 ft 82.7 ft
15.0ft	26.7 fc 33.9 ft 124.1 ft
20.0ft	20.0 fc 45.1 ft 165.5 ft
25.0ft	16.0 fc 56.4 ft 206.8 ft
30.0ft	13.3 fc 67.7 ft 248.2 ft

■ Vert. Spread: 96.9°
■ Horiz. Spread: 152.8°

