
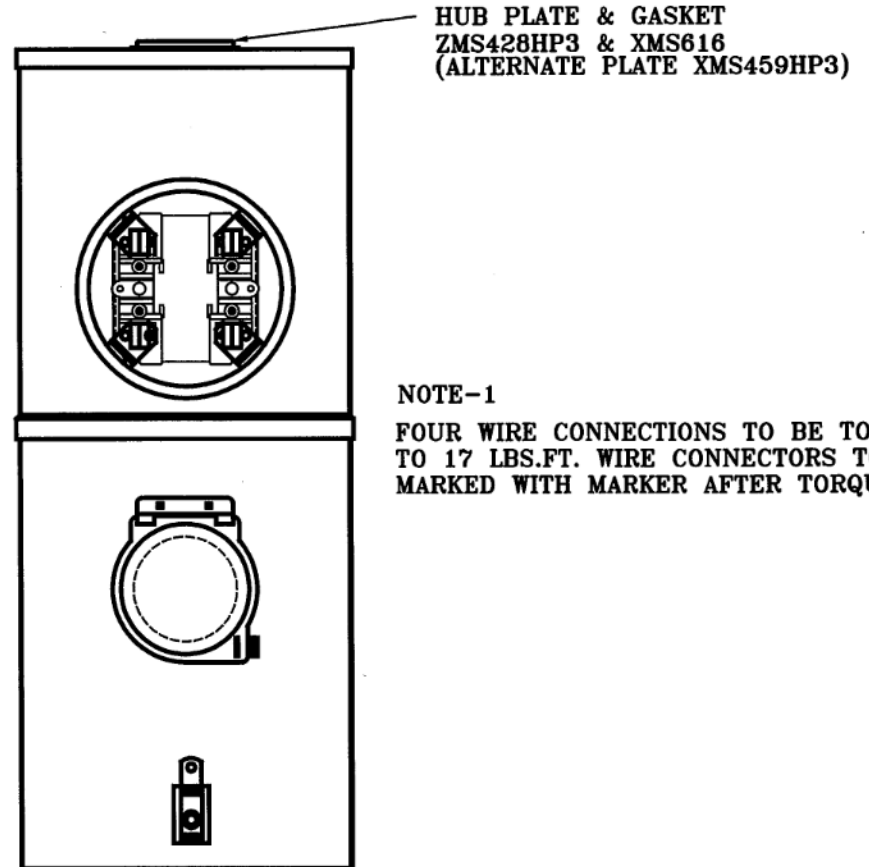


NOTE: (NOT SHOWN)

STAINLESS STEEL METER RING,
THROW-AWAY METER FILLER DISC,
ARE PROVIDED WITH THE METER SOCKET
METER SOCKET RATED 200 AMPS 240VAC

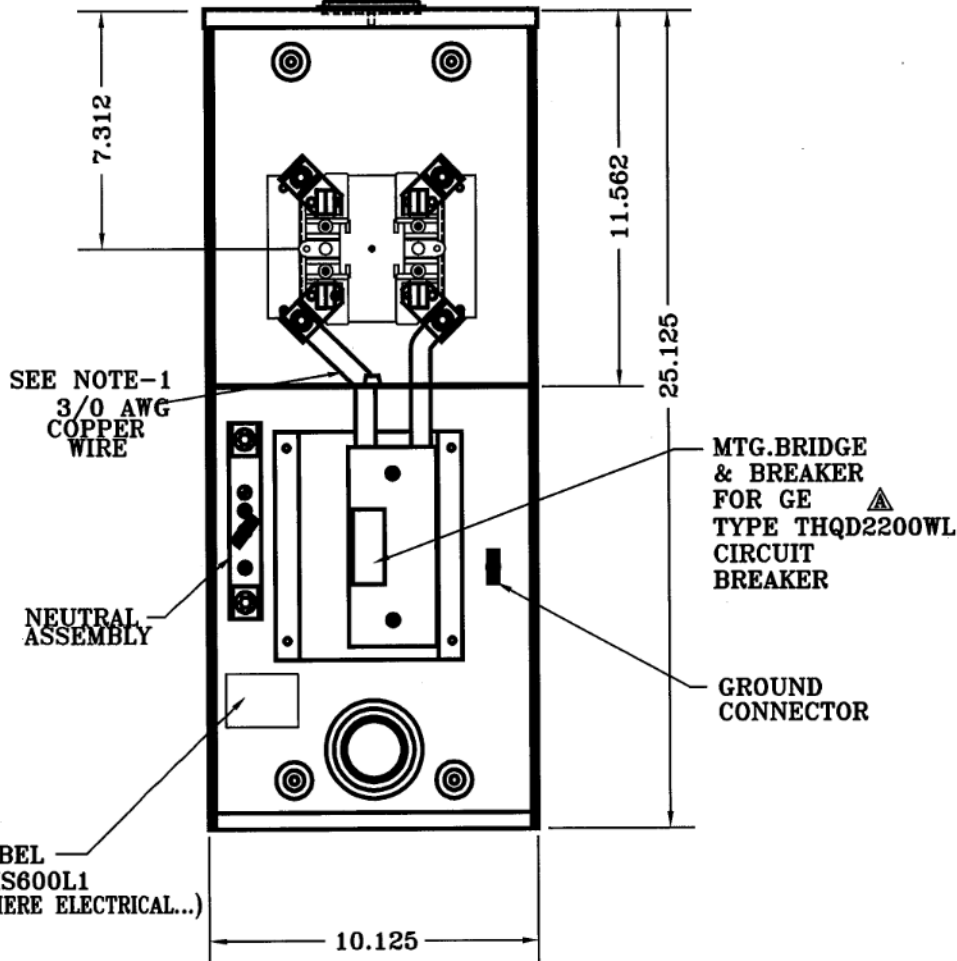


NOTE-1

FOUR WIRE CONNECTIONS TO BE TORQUED
TO 17 LBS.FT. WIRE CONNECTORS TO BE
MARKED WITH MARKER AFTER TORQUING.

LABEL
XMS600L1
(WHERE ELECTRICAL...)

1-1/4", 1-1/2", 2", 2-1/2" KO's
QTY. 4
(1-3/4", 2", 2-1/2", 3" DIA.)

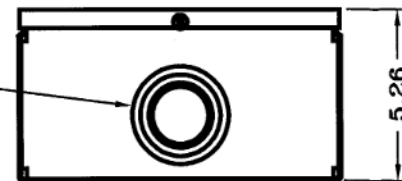

B	MAY 9/17	ADDED NOTE-1
A	SEPT. 13/13	WAS EATON BREAKER
REV	DATE	CHANGE
DO NOT SCALE		
SCALE:	ALL DIMENSIONS ARE IN INCHES UNLESS NOTED	
DR'N BY:	DATE:	
	PJS	APR 26/12
APP'D BY:	DATE:	

HYDEL ENTERPRISES DIVISION OF CIRCA METALS INC. 206 GREAT GULF DRIVE, VAUGHAN	
DESCRIPTION	200A MAX. 2P BRKR. COMBINATION METER SOCKET
REV. B	SHEET OF
PART NO.	JA402P-HI
DWG. NO.	JA402PHI

NOTE : LATCH TO BE TAPED HORIZONTALLY ON BREAKER COVER
AFTER MOUNTING ON ENCLOSURE

