


# RECTANGLE STEP LIGHTS 12V

4011

# WAC

## LANDSCAPE LIGHTING

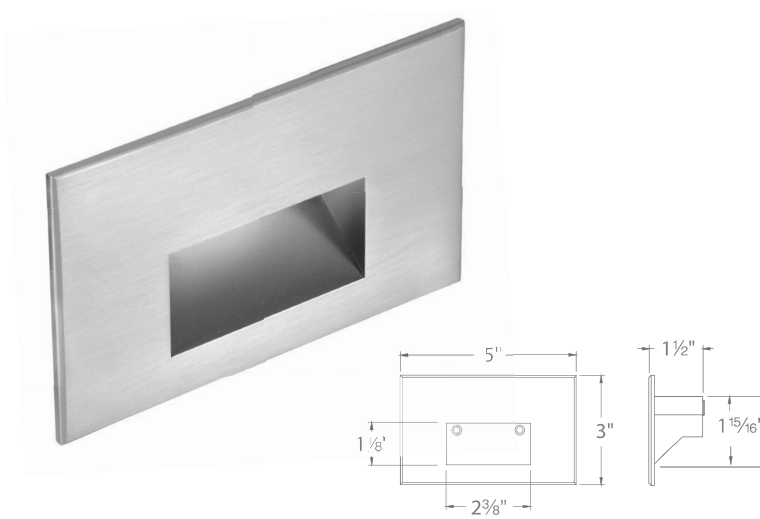

Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

### PRODUCT DESCRIPTION

Horizontal rectangle step light designed for safety and style on stairways, patios, decks, balcony areas, walkways and building perimeters.

Features an architectural design. Energy efficient for long-lasting outdoor lighting solutions. Creates an attractive, romantic impression at night.

### FEATURES

- Solid diecast brass, corrosion resistant aluminum alloy, or cast stainless steel construction
- IP66 rated, Protected against high-pressure water jets
- Conveniently adapts into existing 12V system
- Invisible hardware
- Maintains constant lumen output against voltage drop
- UL 1838 Listed

### SPECIFICATIONS

- Input:** 9-15VAC (Transformer is required)  
**Power:** 2W / 3.1VA  
**CRI:** 90  
**Mounting:** Fits into 2" x 4" J-Box with minimum inside dimensions of 3"L x 2"W x 2"H. Includes bracket for J-Box mount.  
**Rated Life:** 60,000 hours

### ORDERING NUMBER

		Color Temp	CRI	Finish	Lumens	
4011	12V	27	2700K	90	<b>BBR</b> Bronze on Brass	17
					<b>BK</b> Black on Aluminum	17
					<b>BZ</b> Bronze on Aluminum	17
					<b>WT</b> White on Aluminum	38
	30	3000K	90	<b>BBR</b> Bronze on Brass	17	
				<b>BK</b> Black on Aluminum	17	
				<b>BZ</b> Bronze on Aluminum	17	
				<b>WT</b> White on Aluminum	38	
				<b>SS</b> Cast Stainless Steel	23	
	AM	Amber	-	<b>BBR</b> Bronze on Brass	11	
				<b>BK</b> Black on Aluminum	11	
				<b>BZ</b> Bronze on Aluminum	11	
<b>WT</b> White on Aluminum				23		
					<b>SS</b> Cast Stainless Steel	14

4011-\_\_\_\_\_

Example: 4011-30BK

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91760

# RECTANGLE STEP LIGHTS 12V

4011

# WAC

## LANDSCAPE LIGHTING

### Magnetic Transformers

*Stainless Steel, 12-15V output, IP65 rated, UL 1838 listed  
See transformer spec sheet for details and its accessories*



**9075-TRN-SS**  
75W Max

**9150-TRN-SS**  
150W Max

**9300-TRN-SS**  
300W Max

**9600-TRN-SS**  
600W Max

### TESTED MAGNETIC LOW VOLTAGE (MLV) DIMMERS


Luminaire	Dimmer					
	Manufacturer	Family	Model	Power Rating	Range*	Note
4011	Lutron	Diva	DVLV-600	600W	23% - 100%	
		Skylark	SLV-600P	600W	17% - 100%	Best performance
		Skylark	S-10P	1000W		Not recommended

\*Low end of this range is determined by output current which may not directly translate to the perceived light output


WAC Lighting fixtures are compatible with a variety of dimmers. For your convenience we have included a compatibility chart showing dimmers which have been tested with our products. The recommended list below is based upon testing conducted in a lab, and the results can vary in certain field applications due to a number of factors. Exclusion from the list does not imply incompatibility, just that it has not been tested by WAC Lighting. Please reference the dimmer manufacturer's instructions for installation, or contact a WAC Lighting professional at 800-526-2588.

### Spacing Recommendations for Optimal Light Distribution


Corridors / Hallways

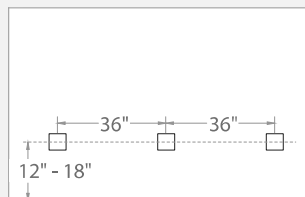

Stairs - Wall Mount

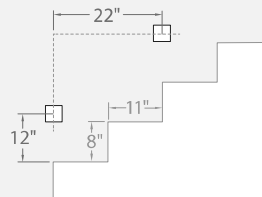

Stairs - Step Mount



Mount in center of stair as close to the upper tread as possible. For best results use one light per step for steps narrower than 5 feet

**wacighting.com**  
Phone (800) 526.2588  
Fax (800) 526.2585

**Headquarters/Eastern Distribution Center**  
44 Harbor Park Drive  
Port Washington, NY 11050

**Central Distribution Center**  
1600 Distribution Ct  
Lithia Springs, GA 30122

**Western Distribution Center**  
1750 Archibald Avenue  
Ontario, CA 91760