


# GRAND ACCENT 12V

5211

# WAC

## LANDSCAPE LIGHTING

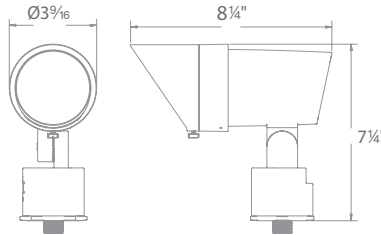

Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

### PRODUCT DESCRIPTION

Landscape accent luminaire. One fixture replaces all older halogen landscape accent lights

### FEATURES

- Adjustable and lockable beam angle
- Integral dimmer
- IP66 rated, Protected against high-pressure water jets
- Includes a detachable shroud
- Solid diecast brass or corrosion resistant aluminum
- Factory sealed water tight fixtures
- Mounting stake, 6' lead wire and direct burial gel filled wire nuts included
- Maintains constant lumen output against voltage drop
- UL 1838 Listed
- Not suitable to use with external dimmers

### SPECIFICATIONS

**Input:** 9 - 15VAC (Transformer is required)  
**Power:** 15W to 35W / 21VA - 44VA  
**Brightness:** 740 lm to 2000 lm  
**Beam Angle:** 15° to 60°  
**CRI:** 85  
**Rated Life:** 45,000 hours

### ORDERING NUMBER

		Color Temp		Finish	
<b>5211</b>	<i>Grand Accent 12V</i>	<b>27</b>	2700K	<b>BK</b>	<i>Black on Aluminum</i>
		<b>30</b>	3000K		
		<b>40</b>	4000K		
				<b>BZ</b>	<i>Bronze on Aluminum</i>

5211-\_\_\_\_\_

Example: **5211-40BK**

waclighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91760











# GRAND ACCENT 12V

5211

# WAC

## LANDSCAPE LIGHTING

### Accessories

Accent Snoot		<b>5211-SNOOT-BK</b> <b>5211-SNOOT-BZ</b>	Black on Aluminum Bronze on Aluminum	Shields lamp and reduces glare
6" Long Shroud		<b>5211-LSHR-BK</b> <b>5211-LSHR-BZ</b>	Black on Aluminum Bronze on Aluminum	Reduce glare. Ideal for downlighting application
Additional Stake		<b>9000-ST9-BZ</b>	Bronze	Durable PVC stake
Surface Mount Flange/Stake		<b>5000-SCP-BZ</b> <b>5000-SCP-BBR</b> <b>5000-SCP-BK</b>	Bronze on Aluminum Bronze on Brass Black on Aluminum	Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box
Guardian Mount		<b>9000-SP9-BZ</b>	Stainless Steel	Heavy duty stainless steel spike to position fixture Formed from a single piece of metal
Gutter Mount Bracket		<b>5000-GM-BZ</b> <b>5000-GM-BK</b>	Stainless Steel	Stainless Steel universal mounting bracket for gutter mounting fixture
Tree Mount Junction Box		<b>5000-TCP-BZ</b> <b>5000-TCP-BK</b>	Bronze on Aluminum Black on Aluminum	Bronze on Aluminum box with Stainless steel mounting screws. Two ½" NPT threaded holes
Optics		<b>LENS-25-AMB</b> Amber <b>LENS-25-GRN</b> Green <b>LENS-25-RED</b> Red	<b>LENS-25-BLU</b> Blue <b>LENS-25-FR</b> Frosted	Enhances saturation of florals and foliage
Extension Rods		<b>5000-X04-BZ</b> 4 in <b>5000-X04-BK</b> 4 in <b>5000-X08-BZ</b> 8 in <b>5000-X08-BK</b> 8 in <b>5000-X12-BZ</b> 12 in <b>5000-X12-BK</b> 12 in	<b>5000-X18-BZ</b> 18 in <b>5000-X18-BK</b> 18 in <b>5000-X24-BZ</b> 24 in <b>5000-X24-BK</b> 24 in	Extends distance between Accent light and Surface Mount Canopy, Stake, or Tree Mount box
Rod L-Coupler		<b>5000-LCO-BZ</b>	Bronze	

### Magnetic Transformers

Stainless Steel, 12-15V output, IP65 rated, UL 1838 listed  
See transformer spec sheet for details and its accessories

**9075-TRN-SS**  
75W Max

**9150-TRN-SS**  
150W Max

**9300-TRN-SS**  
300W Max

**9600-TRN-SS**  
600W Max



waclighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. JUL 18 2018