


## 3Way CCT Adjustable 4" Multi-Directional Gimbal



### Features

- IC Rated
- Airtight
- Dimmable
- 3CCTs 3000K,4000K,5000K selectable
- Work with most of existing dimmer in market
- Five years limited warranty
- Not for emergency lighting
- Suitable for damp locations

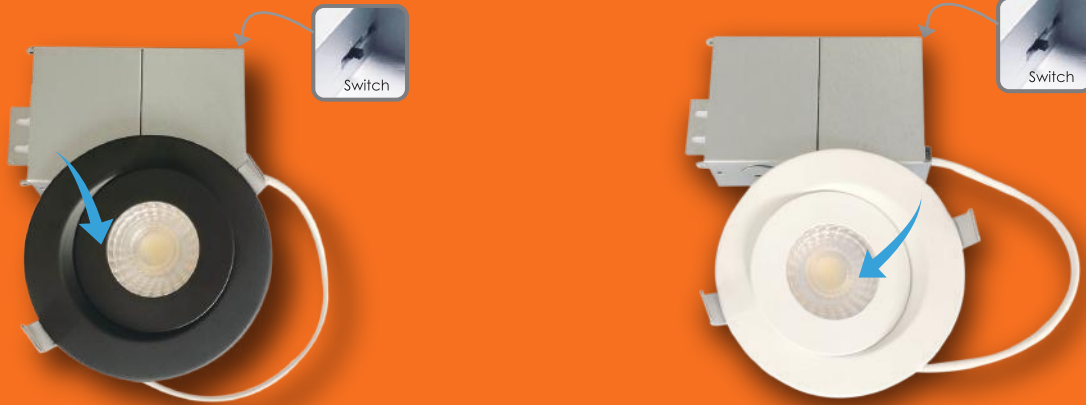




360° Rotation




90° Tilt

Specification	DL4-023-8WH83	DL4-023-8BK83
Model No.	DL4-023-8WH83	DL4-023-8BK83
Dimension	Φ4.7" x 1.1"	Φ4.7" x 1.1"
Fixture Color	White	Black
Watts	8W	8W
Volts	120V	120V
CRI	80	80
Color Temperature	3000K,4000K,5000K Selectable	3000K,4000K,5000K Selectable
Initial Lumens	700	700
Beam angle	40°	40°
Operating Temperature	-20°C ( -4°F ) – 40°C ( 104°F )	-20°C ( -4°F ) – 40°C ( 104°F )
Average Rated Life	50,000H	50,000H
Weight(g)	440	440
Warranty	5 years	5 years

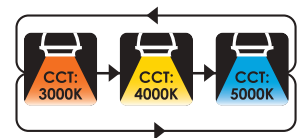


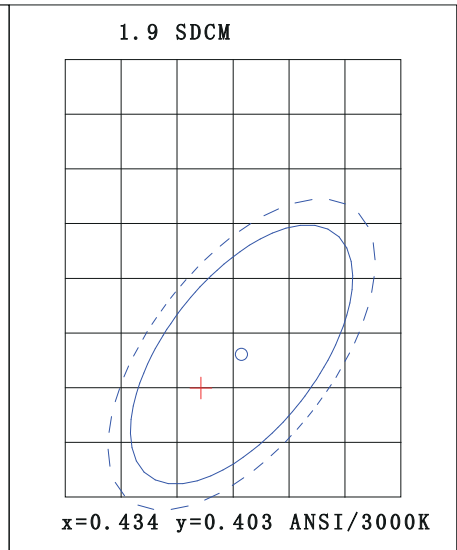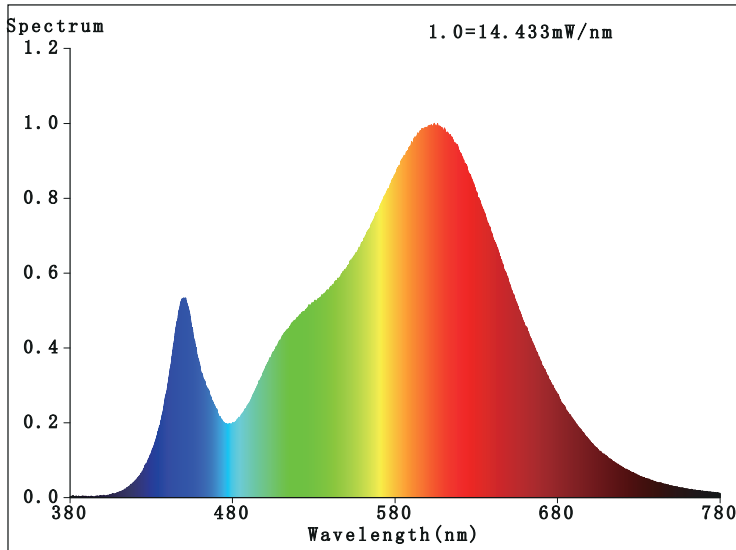

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

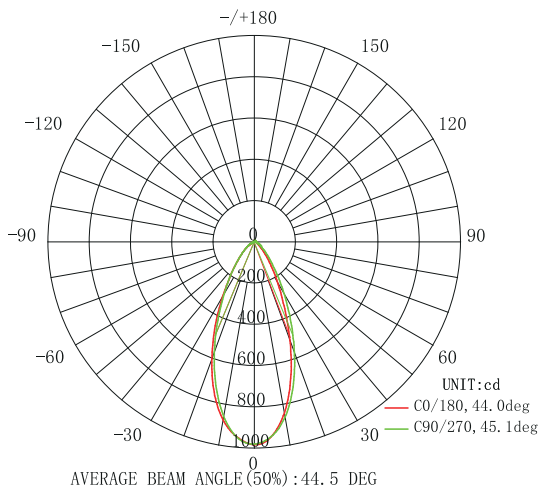

## AAI Figure

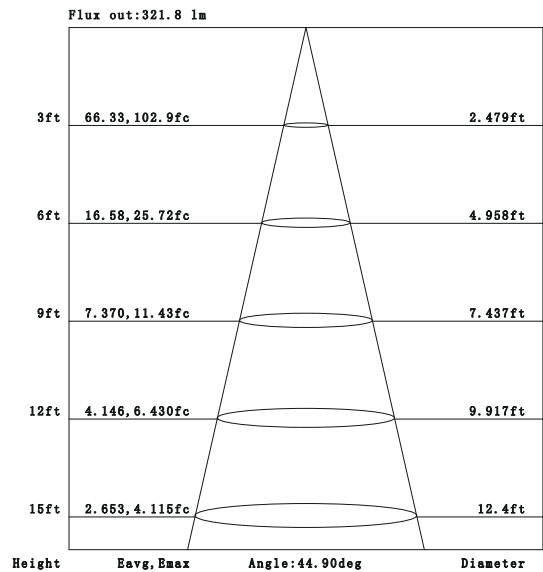

## Dimensions

