

## Dual Heads LED Emergency Light




### Features:

- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- Innovative, easy installation in minutes
- Suitable for wall mount applications
- Universal J-box mounting pattern
- 120/347VAC Dual Voltage operation
- 2pcs 1W ultra bright LED lamp heads for emergency mode
- Luminous Flux: more than 200 LM
- Built-in 3.6V 1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- UL and CULus listed
- 32°F (0°C) to 104°F (40°C) indoor damp location listed
- Five years warranty for the electrical parts and housing
- Three years warranty for battery

### Specification

Model No.	JLEU10
Charging Time	24h
AC Voltage	120V/347V 50-60Hz
AC Charging Current (MAX)	100mA
DC Charging Voltage	4.2V
DC Charging Current (MAX)	75mA
Distance Time	≥90mins
Discharge Current	700mA-900mA
Luminous Flux	≥200LM
Color Temperature	6000K-7000K
Packing Information	14"x9.65"x10.2" 6pcs 4.62/3.45kgs

### Dimensions:

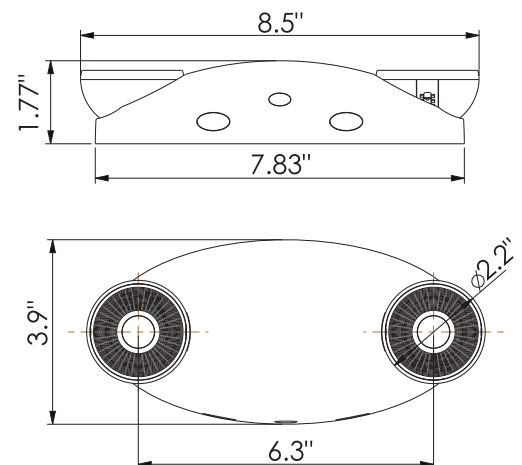

No Glare

Efficient Thermal  
Dissipation

Instant On

No Flicker