

# LED Exit Signs

## MODEL OE-126





### HIGHLIGHTS

- LED Pictogram Exit Sign with 120 minutes backup time
- LED Exit Signs with innovative, snap-together design, which allow for fast and easy installation
- Injection-molded thermoplastic ABS housing with Universal mounting (wall, side and ceiling)
- Has UL-94V-0 flame rating and is fire-retardant
- Includes Test button and charge indicator light
- Provides Overcharge & over-discharge protection

### SPECIFICATIONS

Model	<b>OE-126</b>
Wattage	<b>4.5W</b>
Voltage	<b>120V AC or 347V AC /60Hz</b>
Material	<b>Injection molded thermoplastic ABS housing</b>
Battery	<b>3.6V 900mAh</b>
Emergency Duration Time	<b>≥ 120 min</b>
Conversion Time	<b>&lt; 0.2 seconds</b>
Grade of Protection	<b>IP 20</b>
Insulation	<b>II, Range: 80m<sup>2</sup></b>
Operating Temp.	<b>0°C ~ +40°C</b>
Warranty	<b>5 years</b>

### DIMENSIONS

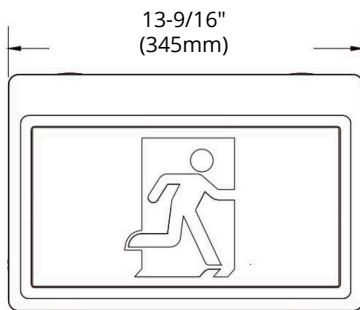

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: