

Remote Capable STEEL Battery Unit Light

Specifications

Features:

- . Steel housing and thermal plastic remote heads
- . High efficiency LED
- . Universal wall mount
- . Dimension: 13.98"x9.06"x3.46"
- . 5 Years Warranty for the electronic parts and housing , 3 Years Warranty for battery

Electrical Specifications


- . 120/277/347VAC input(UL)
- . Two 2W LED heads
- . Diagnostic/pilot LED for AC ON and Charge
- . Push button test switch
- . Charging time: 24 hours
- . Emergency time: 4W--30 hours
- . Remote capable: 72W--30 minutes
- . 12V 7000mA Lead Acid battery
- . Operating temperature: 41° F (5°C) to 86° F (30°C)

Visible distance



d=28m

Data, Photometric Data

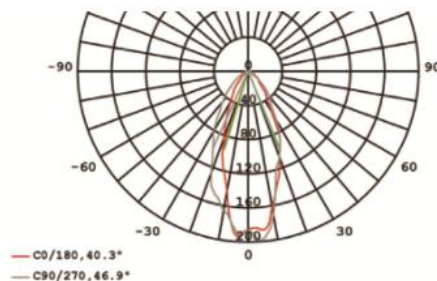

Dimensions:

