

4FT Linkable Wrap Light LED 3Way CCT Changeable




5520 LM



Specification

Model No.	Power	Input Voltage	Brightness	CCT	L x W x H
VO-WR5FT4W48-120-3Way-L	48W	120-277V	5520LM	3Way CCT Adjustable (3000K/4000K/5000K)	47.2" x 5.3" x 2.1"

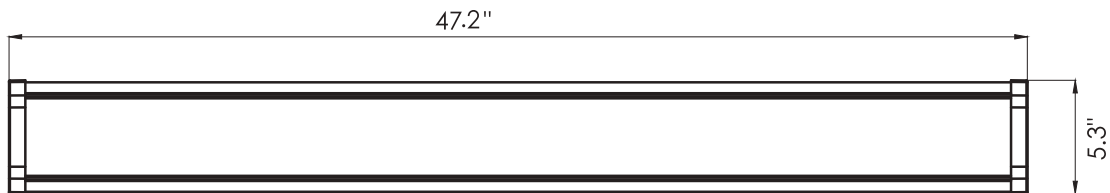

General Characteristics

Fixture Life Hours	50000 Hours
Bulb	Integrated LED
Lumens Per Watt (LPW)	110.00

Safety Rating	ETL - Damp Location
---------------	---------------------

Fixture Characteristics	
Shape	Linear
Mounting	Surface / Suspend
Use Location	Indoor

Electrical Characteristics	
Watts	48 W
Volts	120-277V
Power Factor	0.95
Operating Temperature	-20°C to 45°C (-4°F to 113°F)

Light Characteristics	
Brightness	5520 Lumens
Color Accuracy (CRI)	80
Color Temperature	4000K / 5000K / 3Way CCT
Beam Angle	110°

Product Dimensions	
Item Dimensions (in)	(L) 47.6 (W) 5.3 (H) 2.1

Options: (Sell Separately)	Double Head Male Connector Linking Cable Power Cord Chain Kit
---------------------------------	--

Options:

(Sell Separately)



Connector




Linking Cable



Power Cord






Chain Kit






4FT Linkable Wrap Light LED 3Way CCT Changeable


Surface Mounting

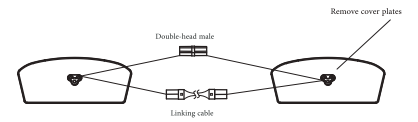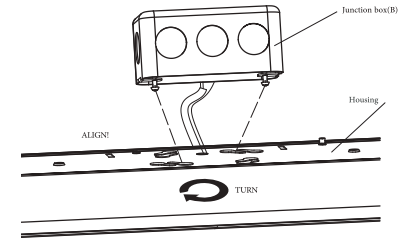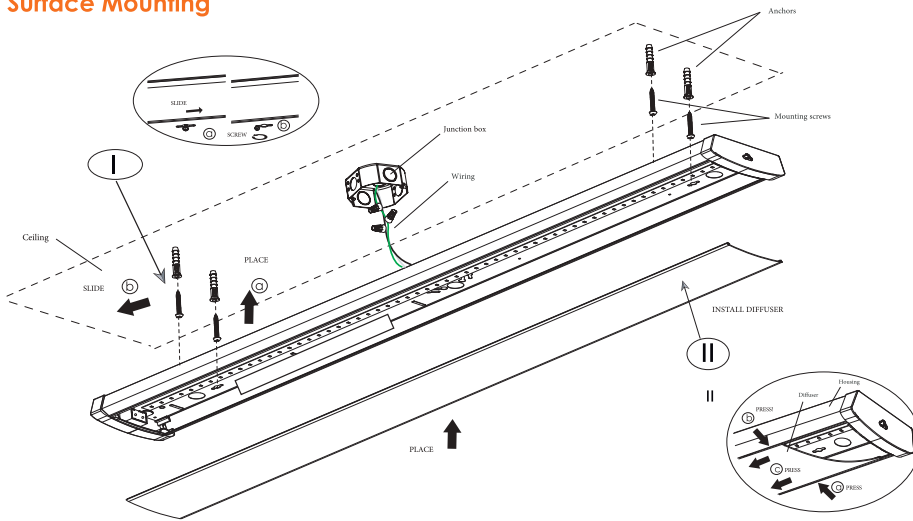

Suspension Mounting

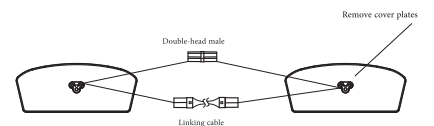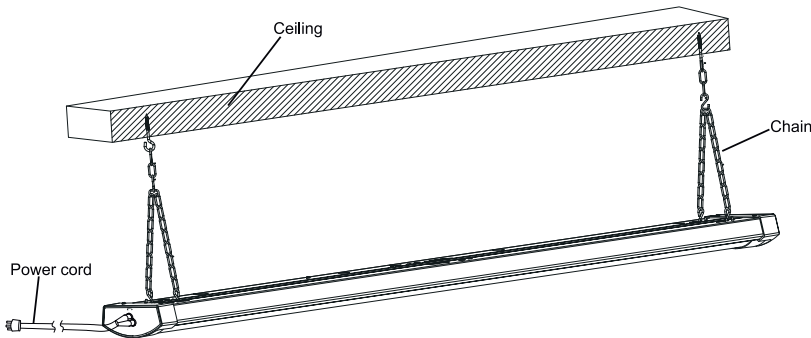

Goniophotometer Test

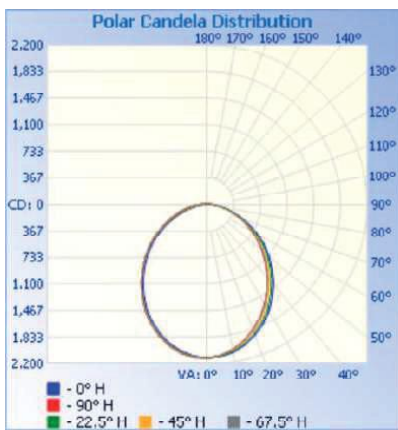

	Efficiency	Lumens	Horizontal Spread	Vertical Spread
Field (%10):	%96.7	5,219.0	161.9	156.3
Beam (%50):	%64.7	3,489.3	99	101.8
Total:	%99.9	5,389.7		

Distance	Illuminance at a Distance	
	Center Beam FC	Beam Width
0.7ft	4,758.52 fc	1.6ft
1.3ft	1,189.63 fc	3.3ft
2.0ft	528.73 fc	4.9ft
2.7ft	297.41 fc	6.6ft
3.3ft	190.34 fc	8.2ft
4.0ft	132.18 fc	9.8ft

■ Vert. Spread: 101.8° ■ Horiz. Spread: 99.0°

