

| | |
|--------------------|--------------|
| PROJECT: | |
| SCHEDULE: | DATE: |
| PREPARE BY: | |
| NOTES: | |

BFS BULLET FLOODLIGHT (1/2" Knuckle)

DESCRIPTION

naturaLED® Bullet Flood light (BFS) delivers exceptional illumination performance to landscape and security lighting. Our Bullet Flood light provides beam angle distribution of 40°, rated IP65, and comes with 1/2" NPT knuckle mount. Creating bright, security and spot lighting for a variety of applications such as perimeter, entryway, facades, landscapes, retail and residential complexes and architectural lighting.



**Rated Life 50,000 Hours
Warranty 5 Years**

APPLICATIONS

Security, Architectural, Perimeter, Entryway, Pathway, Landscape

FEATURES

- IP65 Rated
- ETL Listed
- ColorTemp: 3000K, 4000K, 5000K
- Voltage: 120-277V
- Powerfactor >0.9
- Surge Protection: 2KV
- Beam Angle: 40°
- CRI: >80
- Voltage Frequency (Hz): 50/60
- Operating temperature: -22°F - 122°F
- Long life LED chips
- 1/2" NPT threaded knuckle mount
- Material: Aluminum die-cast housing
- Color: Bronze
- 5 Year Warranty

SAMPLE NUMBER LED-FXBFS10/40/830/BZ-KNC

| STYLE | SERIES | FAMILY | WATTAGE | BEAM ANGLE | COLOR TEMP | COLOR | ACCESSORY |
|--------------|---------|-------------------|---------|------------|-----------------|--------|--------------|
| LED | FX | BFS | 10 | 40 | 830 | BZ | KNC |
| LED Lighting | Fixture | Bullet Floodlight | 10 Watt | 40° | CRI 80 3000K | Bronze | 1/2" Knuckle |




ORDERING

| Watts (W) | Ordering Code | Description | CCT (K) | Lumens (Lm) | Equiv. Wattage (W) | Knuckle | IP65 Rated |
|-----------|---------------|---------------------------|---------|-------------|--------------------|---------|------------|
| 10 | 9291 | LED-FXBFS10/40/830/BZ-KNC | 3000K | 900 | 100 | 1/2" | • |
| 10 | 9295 | LED-FXBFS10/40/840/BZ-KNC | 4000K | 900 | 100 | 1/2" | • |
| 10 | 9292 | LED-FXBFS10/40/850/BZ-KNC | 5000K | 900 | 100 | 1/2" | • |
| 21 | 9293 | LED-FXBFS20/40/830/BZ-KNC | 3000K | 1,800 | 150 | 1/2" | • |
| 21 | 7045 | LED-FXBFS20/40/840/BZ-KNC | 4000K | 1,800 | 150 | 1/2" | • |
| 21 | 9294 | LED-FXBFS20/40/850/BZ-KNC | 5000K | 1,800 | 150 | 1/2" | • |

DIMENSIONS



10W / 21W
1.50-lbs

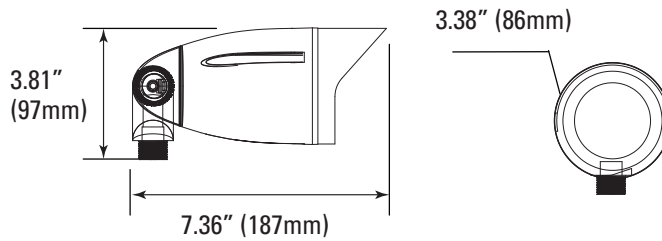

PHOTOMETRICS CHART

10 Watt

21 Watt



| Center Beam fc | Beam Width | |
|----------------|------------|---------|
| 2.5R | 2.15 fc | 2.2 ft |
| 5.0R | 53.7 fc | 4.4 ft |
| 7.5R | 23.9 fc | 6.6 ft |
| 10.0R | 13.4 fc | 8.7 ft |
| 12.5R | 8.60 fc | 10.9 ft |
| 15.0R | 5.97 fc | 13.1 ft |

Vert. Spread: 47.2°
Horiz. Spread: 46.3°

| Center Beam fc | Beam Width | |
|----------------|------------|---------|
| 2.5R | 420 fc | 2.2 ft |
| 5.0R | 105 fc | 4.3 ft |
| 7.5R | 46.7 fc | 6.5 ft |
| 10.0R | 26.3 fc | 8.6 ft |
| 12.5R | 15.8 fc | 10.8 ft |
| 15.0R | 11.7 fc | 12.9 ft |

Vert. Spread: 46.6°
Horiz. Spread: 47.1°

PACKAGE

Case Qty 10 pcs

