

FMC FLUSH MOUNT COMPACT 7" (CCT5)

DESCRIPTION

naturaLED® Compact Flush Mounts (FMC) are an excellent replacement solution for traditional incandescent and fluorescent ceiling and wall mounted fixtures. Our FMC series is easy to install, dimmable, and wet location rated. The FMC is available in 2 models; a 3000K version, or CCT5 Selectable: 2700K, 3000K, 3500K, 4000K, 5000K. Perfect for residential, commercial and hospitality applications. Ideal for bathrooms, closets, small rooms, storage areas, hallways and stairways.

APPLICATIONS

Bathroom, Decoration, Hallway, Bedroom, Ceiling Mount

FEATURES

- Energy Star
- Wet Location
- UL Listed
- Uniform light distribution and consistent color
- Selectable Color Temperature: 2700K, 3000K, 3500K, 4000K, 5000K
- Dimmable: Incandescent dimming
- Input line voltage: 120V
- CRI: 90
- Surge Protection: 2.5KV
- Powerfactor >0.9
- Beam Angle: 120°
- Recommended ceiling height: 8-10ft
- Operating temperature: - 4°F - 104°F
- 5 Year Warranty
- Finish: White

PROJECT:

SCHEDULE:

DATE:

PREPARE BY:

NOTES:



Rated Life 50,000 Hours
Warranty 5 Years

ACCESSORIES (INCLUDED)



Recessed can installation kit

SAMPLE NUMBER LED7FMC-96L9CCT5

| STYLE | DIAMETER | SERIES | LUMEN | CRI | COLOR TEMP |
|---------------------|-------------|----------------------------|-------------------|-------------|------------------------------------|
| LED led lighting | 7 7 inch | FMC flush mount compact | 96L 960 lumens | 9 CRI 90 | CCT5 5 selectable color temp |



FLUSH MOUNT COMPACT 7" (CCT5)

CEILING & AREA LUMINAIRES


ORDERING

| Watts (W) | Ordering Code | Description | CCT (K) | Lumens (Lm) | Equiv. Wattage (W) | Size | Wet Location | Energy Star |
|-----------|---------------|------------------|-----------------|-------------|--------------------|------|--------------|-------------|
| 12 | 9522 | LED7FMC-96L930 | 3000K | 960 | 100 | 7" | • | • |
| 12 | 9523 | LED7FMC-96L9CCT5 | 27/30/35/40/50K | 960 | 100 | 7" | • | • |

ACCESSORIES (INCLUDED)


Installation Kit

(Recessed can installation kit)




DIMENSIONS

12W (7-inch)
0.53-lbs

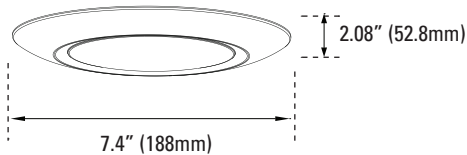


12W (7-inch) CCT5
0.55-lbs

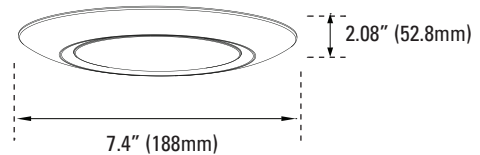

PHOTOMETRIC CHART


12W (7-inch)
Energy Star

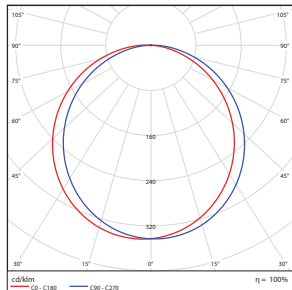

| Center Beam fc | Beam Width | |
|----------------|------------|-----------------|
| 1.7ft | 116 fc | 5.1 ft 5.1 ft |
| 3.3ft | 30.8 fc | 9.8 ft 9.9 ft |
| 5.0ft | 13.4 fc | 14.9 ft 15.0 ft |
| 6.7ft | 7.47 fc | 20.0 ft 20.0 ft |
| 8.3ft | 4.86 fc | 24.8 ft 24.8 ft |
| 10.0ft | 3.35 fc | 29.8 ft 29.9 ft |

■ Vert. Spread: 112.3°
■ Horiz. Spread: 112.5°

12W (7-inch) CCT5
Energy Star

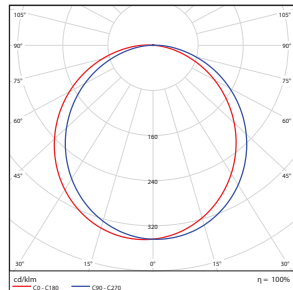

| Center Beam fc | Beam Width | |
|----------------|------------|-----------------|
| 1.7ft | 116 fc | 5.0 ft 5.1 ft |
| 3.3ft | 30.8 fc | 9.8 ft 9.8 ft |
| 5.0ft | 13.4 fc | 14.8 ft 14.9 ft |
| 6.7ft | 7.47 fc | 19.9 ft 20.0 ft |
| 8.3ft | 4.87 fc | 24.6 ft 24.7 ft |
| 10.0ft | 3.35 fc | 29.6 ft 29.8 ft |

■ Vert. Spread: 112.0°
■ Horiz. Spread: 112.3°

PACKAGE

Case Qty
20 pcs

