



Nonmetallic Boxes

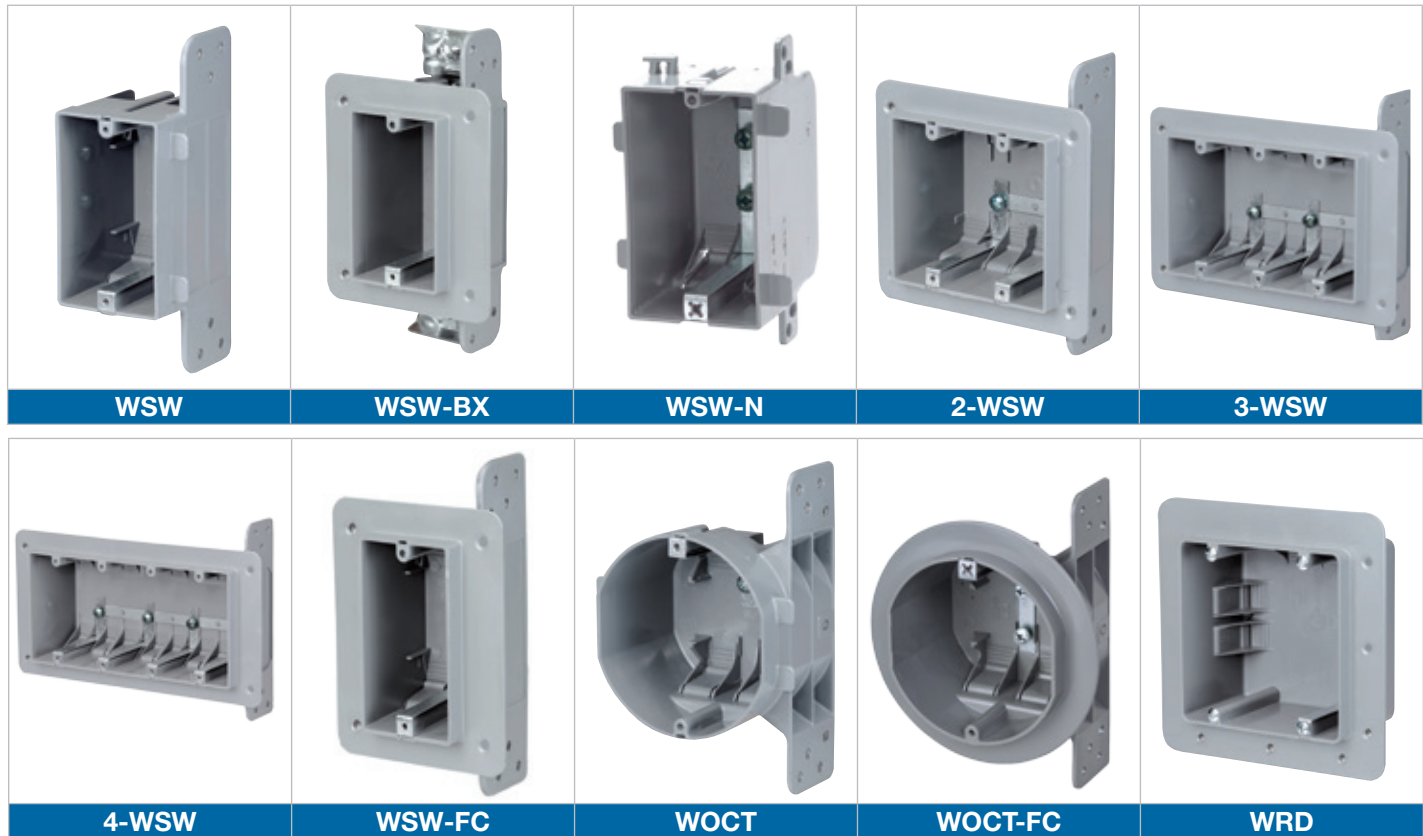

| Cat. No. | Volume (Cu. in.) | Width (in.) | Edge Height (in.) | Edge Width (in.) | Cable Entries | Use with |
|--|------------------|-------------|-------------------|------------------|---------------|----------------------------|
| 2-3/4 in. Deep - 3-3/4 in. High – Device boxes | | | | | | |
| WSW | 18.0 | 2-1/4 | — | — | 4 | Nonmetallic sheathed cable |
| WSW-BX | 18.0 | 2-1/4 | 5 | 4-1/4 | 4 | AC90-Armoured cable |
| WSW-N | 18.0 | 2-1/4 | — | — | 4 | Nonmetallic sheathed cable |
| 2-WSW | 33.0 | 4 | 5 | 5-1/2 | 8 | Nonmetallic sheathed cable |
| 3-WSW | 48.0 | 5-3/4 | 5 | 7-1/2 | 12 | Nonmetallic sheathed cable |
| 4-WSW | 67.0 | 7-5/8 | 5 | 8-3/4 | 16 | Nonmetallic sheathed cable |
| WSW-FC | 18.0 | 2-1/4 | — | — | 4 | Nonmetallic sheathed cable |
| 2-3/4 in. Deep - 3-3/4 in. High - 4 in. Wide – Ceiling boxes | | | | | | |
| WOCT | 26.0 | — | — | — | 4 | Nonmetallic sheathed cable |
| WOCT-FC | 26.0 | — | 5-1/4 | — | 4 | Nonmetallic sheathed cable |
| 3 in. Deep - 4-7/8 in. High - 4-7/8 in. Wide – Oven and dryer | | | | | | |
| WRD | 61.0 | — | 6-7/8 | 6-7/8 | 4 | Nonmetallic sheathed cable |

Nonmetallic Boxes

Airtight Model

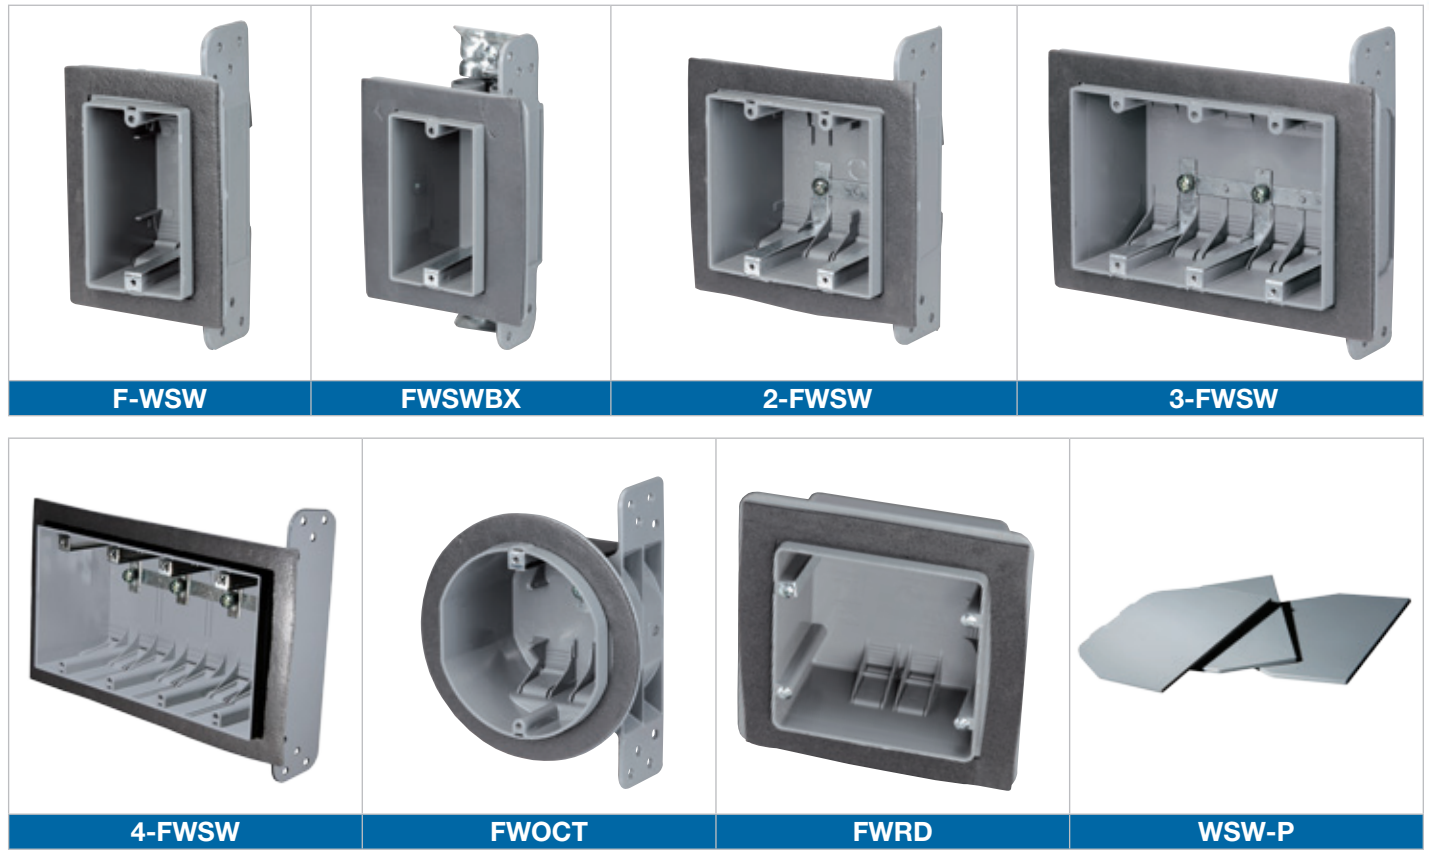

| Cat. No. | Volume (Cu. in.) | Width (in.) | Edge Height (in.) | Edge Width (in.) | Cable Entries | Use with |
|--|------------------|-------------|-------------------|------------------|---------------|----------------------------|
| 2-3/4 in. Deep - Non-Gangable - 3-3/4 in. High – Device boxes | | | | | | |
| F-WSW | 18.0 | 2-1/4 | — | — | 4 | Nonmetallic sheathed cable |
| FWSWBX | 18.0 | 2-1/4 | 5 | 4-1/4 | 4 | AC90 – Armoured cable |
| 2-FWSW | 33.0 | 4 | 5 | 5-1/2 | 8 | Nonmetallic sheathed cable |
| 3-FWSW | 48.0 | 5-3/4 | 5 | 7-1/2 | 12 | Nonmetallic sheathed cable |
| 4-FWSW | 67.0 | 7-5/8 | 5 | 8-3/4 | 16 | Nonmetallic sheathed cable |
| 2-3/4 in. Deep - 3-3/4 in. High - 4 in. Wide – Ceiling boxes | | | | | | |
| FWOCT | 26.0 | — | 5-1/4 | — | 4 | Nonmetallic sheathed cable |
| 3 in. Deep - 4-7/8 in. High - 4-7/8 in. Wide – Oven and dryer | | | | | | |
| FWRD | 61.0 | — | 6-7/8 | 6-7/8 | 4 | Nonmetallic sheathed cable |

| Cat. No. | Description |
|------------------|---|
| Partition | |
| WSW-P | Voltage partition – For 4-WSW and 4-FWSW only |

Note: CEC 2012 rule 30-302: 4) Where the weight of a luminaire does not exceed 23 kg (50 lb.), the luminaire shall be permitted to be supported by a ceiling outlet box attached directly to the building structure or by a ceiling outlet box attached to a bar hanger. Requires that a ceiling-mounted luminaire weighing 23 kg or less be supported on a ceiling outlet box attached directly to the building structure. A bar hanger may also be used to attach a ceiling box to the building structure when the luminaire weighs 23 kg or less.

Nonmetallic Boxes

Fire Resistance Rating: 2 hours



| Cat. No. | Volume (Cu. in.) | Width (in.) | Edge Height (in.) | Edge Width (in.) | Cable Entries | Use with |
|--|------------------|-------------|-------------------|------------------|---------------|----------------------------|
| 2-3/4 in. Deep - Non-gangable - 3-3/4 in. High – Device boxes | | | | | | |
| WSW-US | 18.0 | 2-1/4 | — | — | 4 | Nonmetallic sheathed cable |
| F-WSW-US | 18.0 | 2-1/4 | — | — | 4 | Nonmetallic sheathed cable |
| 2WSW-US | 33.0 | 4 | 5 | 5-1/2 | 8 | Nonmetallic sheathed cable |
| 2-FWSW-US | 33.0 | 4 | 5 | 5-1/2 | 8 | Nonmetallic sheathed cable |
| 2-3/4 in. Deep - 3-3/4 in. High - 4 in. Wide – Ceiling boxes | | | | | | |
| WOCT-US | 26.0 | — | — | — | 4 | Nonmetallic sheathed cable |
| F-WOCT-US | 26.0 | — | — | — | 4 | Nonmetallic sheathed cable |