



Racks


SPOOL RACKS & SCREW BRACKETS

Screw Brackets

| Cat. No. | LS | W | D | Std. Pkg. | Wt.-lbs./ C | Description |
|-----------------------------------|-------|-------|-----|-----------|-------------|--------------------|
| Screw Insulator & Screw Brackets: | | | | | | |
| 211D | 3 | 2 | 3/4 | 50 | 70 | 1/4" SS cotter pin |
| 13712DSS | 3-1/4 | 3-5/8 | 1 | 25 | 80 | |



211D

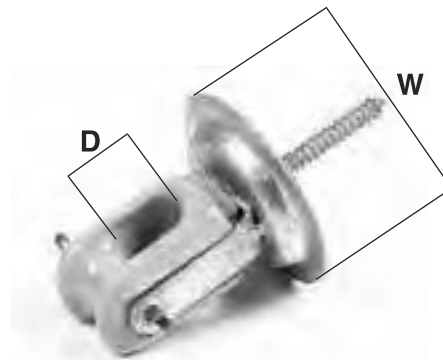

13712DSS

Secondary Racks for Spool Insulators

Insulators not included-C.S.A. standard Drawing No. R-15 complete with through pin, brass cotter pin and 2 formed washers.

| Cat.No. | No. of wires | Overall Length | Std.Pkg. | Wt.-lbs./ C |
|--------------------|--------------|----------------|----------|-------------|
| Non-Extended Ends: | | | | |
| 214NE | 2 | 14" | 5 | 460 |
| 322NE | 3 | 22" | 5 | 720 |
| 430NE | 4 | 30" | 5 | 980 |
| Extended Ends: | | | | |
| 217E | 3 | 17" | 5 | 500 |
| 218E | 2 | 18" | 5 | 520 |
| 326E | 3 | 26" | 5 | 780 |
| 434E | 4 | 34" | 5 | 1040 |
| 534E | 5 | 34" | 5 | 1120 |

Insulators used on above racks #355WSPG.
Available with individual pins - add suffix "H".



322NEH



326E



Secondary Racks-Heavy Duty

Knob Type Racks:

Complete with knob type insulators and non-extended ends.

C.S.A. Specification C-83, Drawing No. R-17 wire spacing 8".

| Cat.No. | No. of wires | Overall Length | Std.Pkg. | Wt.-lbs./ C |
|---------|--------------|----------------|----------|-------------|
| 1045R | 1 | 4-1/2 | 10 | 250 |
| 2145R | 2 | 14-1/2 | 5 | 600 |
| 3200R | 3 | 20-1/2 | 5 | 850 |
| 4280R | 4 | 28" | 5 | 1100 |
| 5360R | 5 | 36" | 5 | 1350 |
| 2180TSR | 2 | 19" | 5 | 500 |

Add 13 at the end of part number when 13/16 mounting holes are required.
Insulator used on above racks #1085D.



1045R



2180TSR



3200R

| Cat.No. | Width | Height | Hole | Pkg. Qty. | Wt.-lbs./ C | |
|------------------------------------|-------|--------|------|-----------|-------------|---|
| Knob-Type (U-Bolt) Insulator only: | | | | | | |
| 1085D | 3 | 3-3/4 | 1 | 25 | 170 | For knob type rack. U-bolts not included. |



1085D

Medium Duty Racks

- 11/16 mounting holes.

- complete with Insulators (1606WSP).

| Cat.No. | No. of Wires | Overall Length | Width | Spacing | Std. Pkg. | Wt.-lbs./ C |
|---------|--------------|----------------|-------|---------|-----------|-------------|
| 1172E | 2 | 15-1/2 | 2-5/8 | 8 | 5 | 420 |
| 1173E | 3 | 23-1/2 | 2-5/8 | 8 | 5 | 690 |
| 1174E | 4 | 31-1/2 | 2-5/8 | 8 | 5 | 960 |

Clevis size - 2 5/16 high x 1 3/4 wide.



1085D