


## NON-FUSED DISCONNECT PULLOUT



### DIMENSIONS

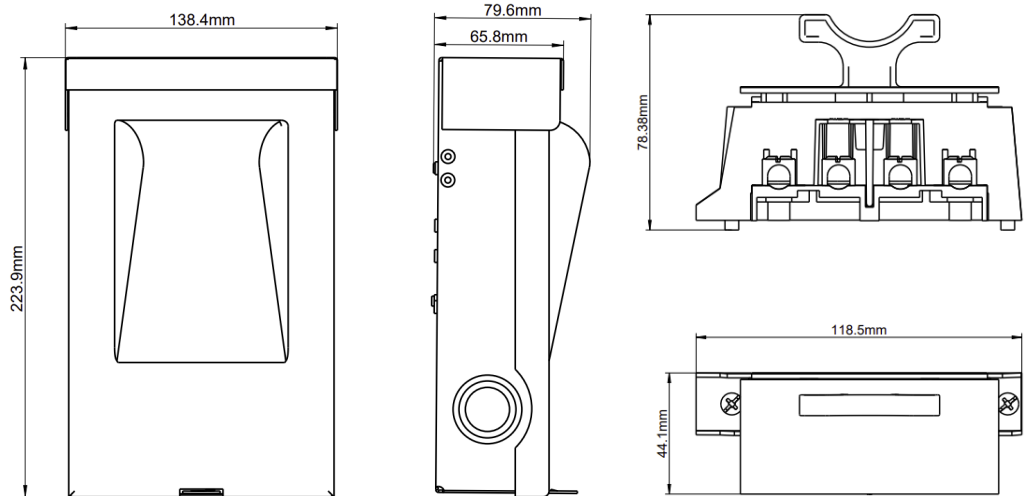

### FEATURES

- NEMA 3R
- COMPACT DESIGN
- INTERNAL SHIELD CAN BE REMOVED WITHOUT TOOLS
- KNOCKOUTS ON BACK, BOTTOM AND BOTH SIDES
- FOR INDOOR AND OUTDOOR USE
- PADLOCKABLE FOR SAFETY

### SPECIFICATIONS

MODEL	48100 (4800)
PHASE	1 - 3 WIRE
AMPS	60A
RATING	NEMA-3R
VOLTS	240V CA
UNIT WEIGHT	1.3 kg
WIRE RANGE	MAX. 10 #14-3 AWG

### MATERIAL AND DIMENSIONS

METALLIC ENCLOSURE  
223.9mm H x 134.4 W X 79.6mm D

### RATINGS



### APPROVAL FILE NUMBER

cULus file#E255965  
Standard: UL 1429; CSA C22.2 NO. 29-15;  
RoHS Compliance