

Allegro II

Convactor



Allegro II²⁶

Allegro II¹⁸

Allegro II¹⁴



Features

Color

- Standard: white.

Finish

- Standard: epoxy/polyester anti-rust powder coating resistant to UV rays.

Voltage

- 240/208V, 60 Hz, 1-phase.

Construction

- Steel cabinet featuring rounded corners and openings that prevent access to the heating element.
- Double opening front air outlet that directs warm air towards the centre of the room. 1
- High-limit temperature control with automatic reset.

Heating element

- X-shaped, monoblock element made of surface-treated extruded aluminum. 2

Control

- Built-in electronic proportional-action digital thermostat, ultra-precise to 1/10 °C (1/5 °F), located at the top of the unit. 3
- LCD backlit display with digital controls lockable by key combination.
- Temperature display format (°C or °F).
- "On-Off" button.
- "Mode" button to choose from Comfort, Economy and Frost Protection modes.
- Heating indicator light.

Installation

- Quick surface-mounted installation, with the included wall mounting bracket, that also serves as marking template.
- Flexible cable with electrical wall box cover plate included.
- Requires installation of a wall electrical box not supplied.

Warranty

- 2-year warranty against defects.
- 5-year warranty on the heating element.


Application

- Kitchen, living room, family room, bedroom, bay window.

Thanks to their distinctive features, Allegro II series convection heaters blend elegance and performance. There are three different profiles available to ensure you can enjoy optimal comfort in any space.



1




2




3


| Recommended installation height | | Minimum clearances | | | | | | | |
|---------------------------------|-----|--------------------|-----|-------|-----|-------|-----|-------|-----|
| | | Front | | Sides | | Above | | Below | |
| in. | mm | in. | mm | in. | mm | in. | mm | in. | mm |
| 4 | 102 | 20 | 508 | 6 | 152 | 4 | 102 | 4 | 102 |



Allegro II²⁶



Allegro II¹⁸

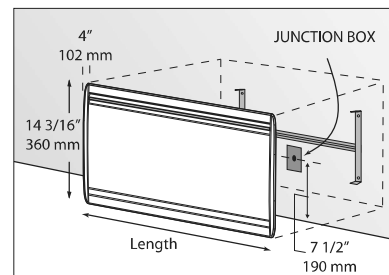

Allegro II¹⁴

Note: The depth shown includes wall bracket.

Allegro II

Models

| Product # | Price | Volts | Watts | Length | | Weight | |
|--|--------|---------|-----------|----------|------|--------|------|
| | | | | in. | mm | lb | kg |
| Allegro II ¹⁴ Height: 14 3/16" (360 mm) | | | | | | | |
| 7305-C05-BB | 551.00 | 240/208 | 500/375 | 19 1/4 | 489 | 9.6 | 4.4 |
| 7305-C10-BB | 615.00 | 240/208 | 1000/750 | 25 9/16 | 649 | 11.9 | 5.4 |
| 7305-C15-BB | 680.00 | 240/208 | 1500/1125 | 33 7/16 | 849 | 15.0 | 6.8 |
| 7305-C20-BB | 753.00 | 240/208 | 2000/1500 | 44 7/16 | 1129 | 18.8 | 8.5 |
| Allegro II ¹⁸ Height: 18 1/2" (470 mm) | | | | | | | |
| 7306-C05-BB | 526.00 | 240/208 | 500/375 | 16 1/8 | 409 | 10.6 | 4.8 |
| 7306-C10-BB | 585.00 | 240/208 | 1000/750 | 19 1/4 | 489 | 11.2 | 5.1 |
| 7306-C15-BB | 642.00 | 240/208 | 1500/1125 | 25 9/16 | 649 | 13.7 | 6.2 |
| 7306-C20-BB | 692.00 | 240/208 | 2000/1500 | 33 7/16 | 849 | 16.8 | 7.6 |
| Allegro II ²⁶ Height: 26 3/4" (680 mm) | | | | | | | |
| 7307-C05-BB | 546.00 | 240/208 | 500/375 | 12 15/16 | 329 | 12.4 | 5.6 |
| 7307-C10-BB | 603.00 | 240/208 | 1000/750 | 16 1/8 | 409 | 14.2 | 6.4 |
| 7307-C15-BB | 662.00 | 240/208 | 1500/1125 | 22 3/8 | 569 | 17.6 | 8.0 |
| 7307-C20-BB | 731.00 | 240/208 | 2000/1500 | 30 1/4 | 769 | 22.9 | 10.4 |

