



2-1/2 in, HUB OPENING

This Document should be DISCARDED if found detached from a Work Order

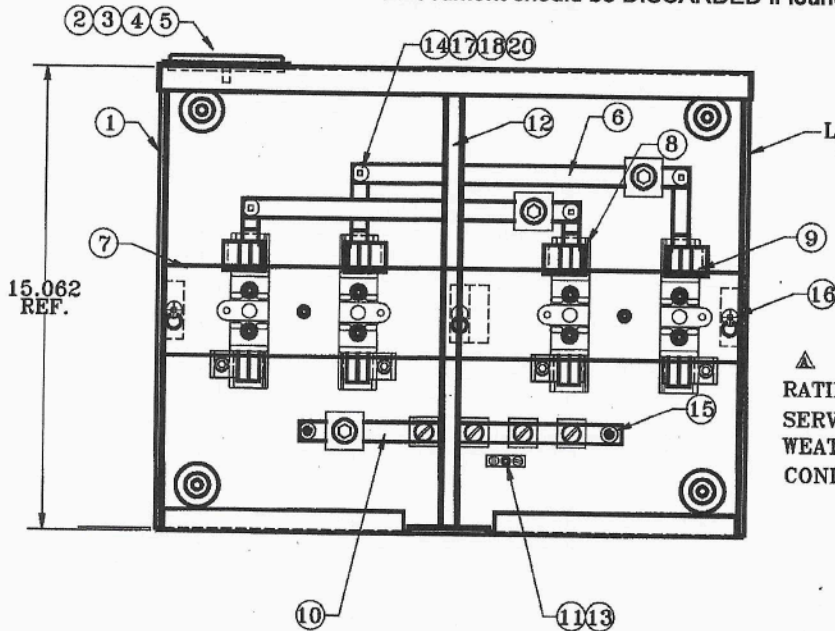

LABEL: CSA ENCLOSURE
CAT.NO. & DATE CODE
INSIDE AND OUTSIDE

▲
RATING: 200A MAIN, 100A PER POSITION
SERVICE ENTRANCE RATED
WEATHERPROOF TYPE 3R ENCLOSURE
CONDUCTOR RANGE: LINE-6-250MCM CU/AL
LOAD-6-1/0AWG CU/AL

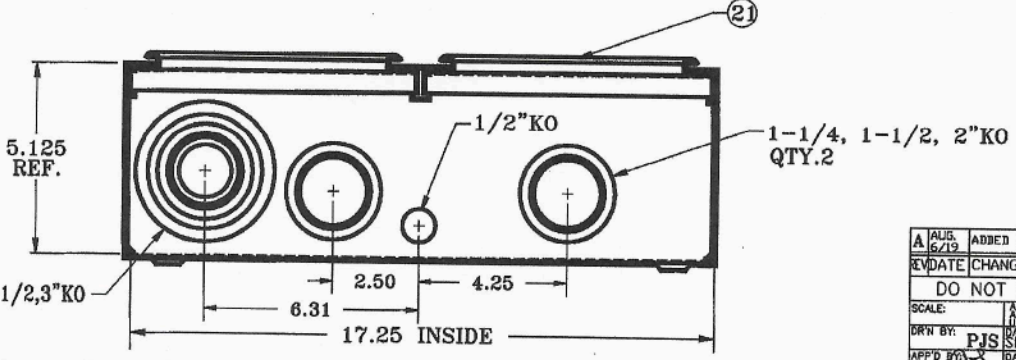

A	ALB.	ADDED RATING NOTE
6/19		
REV	DATE	CHANGE
DO NOT SCALE		
SCALE:	ALL DIMENSIONS GIVE IN FIGURES UNLESS NOTED	
DRN BY:	PJS	DATE: SEPT.21/10
APP'D BY:		DATE:

HE	
HYDEL ENTERPRISES	
DIVISION OF CIRCA METALS INC.	
208 GREAT GULF DRIVE, VAUGHAN	
REV. A	SHEET 1 OF 2
DESCRIPTION	
ASSEMBLY SD220PWBC	
PART NO. SD220PWBC	
DWG. NO. SD220BC	