

SD Series



METER
SOCKETS


100 AMP - MULTI POSITION 200 Amp Main

CATALOGUE #	TYPE	DESCRIPTION	DIMENSIONS (IN.)			WEIGHT
			H	W	D	
SD220PW	O/H & U/G	2 gang, 200 Amp main, 100 Amp per position	12	15	5	20 lbs.
SD320PW	O/H & U/G	3 gang, 200 Amp main, 100 Amp per position	12	22 1/2	5	28 lbs.
SD420PW	O/H & U/G	4 gang, 200 Amp main, 100 Amp per position	12	30	5	36 lbs.
SD520PW	O/H & U/G	5 gang, 200 Amp main, 100 Amp per position	12	37 1/2	5	44 lbs.
SD620PW	O/H & U/G	6 gang, 200 Amp main, 100 Amp per position	12	45	5	52 lbs.

- Factory bussed - 200 Amp Mains
- 2 - 6 position horizontal
- 4 Jaw meter sockets
- 100 Amp - 600 VOLTS per position
- CSA enclosure 3R
- Approved conductor range:
Line No. 6-250 MCM CU/AL
Load No. 6-1/0 AWG CU/AL
- Approved for overhead or underground use

- Field adaptable accessories
- 5th Jaw at 9 O'clock - **SXK503**
- For overhead order **SXC** hub separate
- Add suffix "RH" for right hand entry
- Add suffix "BC" for c/w 1 - 3" KO in the bottom

KNOCKOUT CODE	CONDUIT SIZE
D	1 1/4", 1 1/2", 2"
G	1 1/4", 1 1/2", 2", 2 1/2"
AA	1/2"

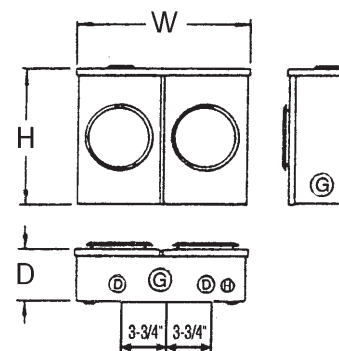

SD220 Conversion Kit

To convert existing SD220PW to a two load single meter, meter socket ST911 - OH