

SWP SELECTABLE CCT3 SLIM WALL PACK

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

DESCRIPTION

naturaLED® slim, low-profile cutoff wall pack with the smooth contemporary design. Well-engineered, high-quality die-cast aluminum, delivering bright, crisp light. The excellent thermal design ensures our SWP's performance over rated life. Installation is made simple and easy with an adjustable angle and hinged junction box. Our 45-Watt Slim Wall Packs are available with wattage and color temperature selectable of Black and Bronze. Optional 3/4" knuckle-mount, adjustable swivel bracket or slip fitter provides you the flexibility for your application. SWP is ideal for landscape, wall/surface, low-level pathway, apartment buildings, schools and multi-use facilities.

APPLICATIONS

Security, Pathway, Perimeter, Entryway, Area Lighting, and building facades

FEATURES

- DLC Premium
- IP65 Rated
- ETL Listed
- ADA Compliance (4" Depth)
- Selectable Wattage and ColorTemp Selectable (3000/4000/5000K)
- Voltage: 120-347V
- Input Current: 0.41A
- Power Factor: >0.9
- Surge Protection: 4KV
- Beam Angle: 140°
- Dimmable: 0-10V
- CRI: >80
- Operating Temperature: -22°F - 122°F
- Photocell Sensor Included
- Adjustable fixture angle
- 1/2" NPT Knock out
- Material: Die Cast Aluminum
- Color: Dark Bronze / Black
- 5 Year Warranty
- Optional for Purchase: Mounting: Slip Fitter, Swivel Bracket, 3/4" NPT Knuckle Mount



Photocell Included



Adjustable Angle



Rated Life 50,000 Hours
Warranty 5 Years

ACCESSORIES

	Slip Fitter
	Swivel Bracket
	Knuckle Mount

SAMPLE NUMBER FXSWP45SW/8CCT3/BK/347-PHO

FAMILY	SERIES	WATTAGE	CRI/COLOR TEMP	FINISH COLOR	VOLTAGE	SENSOR
FX Fixture	SWP Slim Wall Pack	45SW Selectable Wattage 15/28/45	8CCT3 CRI 80 Selectable CCT 30/40/50K	BK Black BZ- Bronze	347 120-347V	PHO Photocell Included



CCT3 SLIM WALL PACK

WALL & AREA LUMINAIRES

ORDERING

*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage	Depth*	Color	IP65 Rated	DLC (S/P)	
15	9589	FXSWP45SW/8CCT3/BZ/347-PHO	3CCT	1,800	100-250W	4"	Bronze	●	P	
28				(3/4/5K)						3,360
45										5,400
15	9590	FXSWP45SW/8CCT3/BK/347-PHO	3CCT	1,800	100-250W	4"	Black	●	P	
28				(3/4/5K)						3,360
45										5,400

*Accessible for Americans with Disability Act

ACCESSORIES (Ordered Separately)

Knuckle Mount



P10254 MT-KNC-SWP/BZ
(3/4" NPT Knuckle - Bronze)



P10006 MT-KNC-SWP/BK
(3/4" NPT Knuckle Black)



Swivel Bracket



P10253 MT-SB-SWP/BZ
(Swivel Bracket - Bronze)



P10005 MT-SB-SWP/BK
(Swivel Bracket Black)




Slip Fitter



P10255 MT-SF-SWP/BZ
(Slip Fitter - Bronze)




P10007 MT-SF-SWP/BK
(Slip Fitter Black)

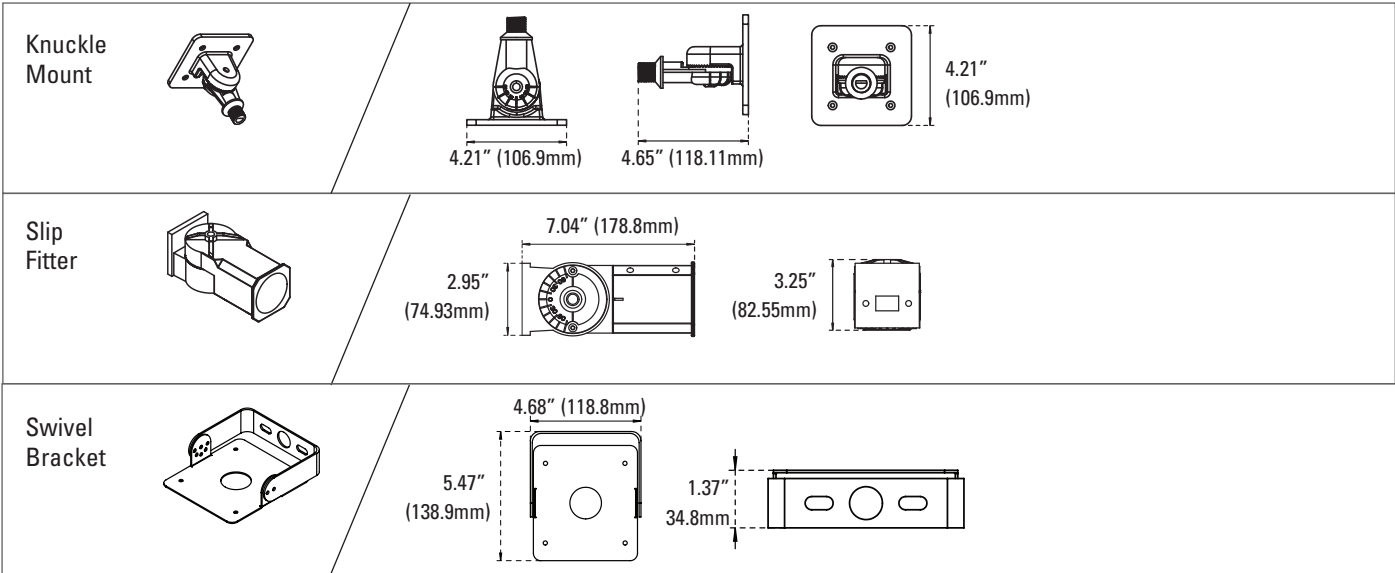


DIMENSIONS

15/28/45W Selectable
4.40-lbs

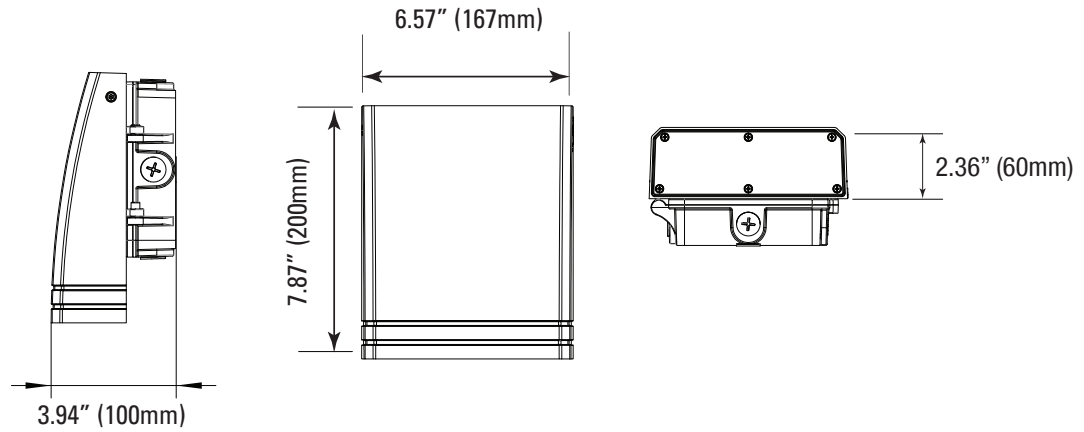

PHOTOMETRICS CHART

45 Watt
DLC Premium

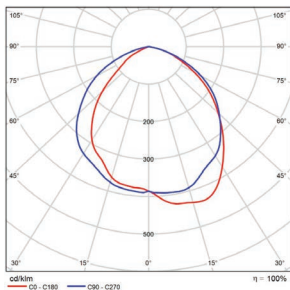

	Illuminance at a Distance	
	Center Beam Fc	Beam Width
2.5R	287 fc	5.2 ft 7.0 ft
5.0R	71.7 fc	10.4 ft 14.0 ft
7.5R	31.9 fc	15.6 ft 20.9 ft
10.0R	17.9 fc	20.8 ft 27.9 ft
12.5R	11.5 fc	26.0 ft 34.9 ft
15.0R	7.95 fc	31.2 ft 41.9 ft

■ Vert. Spread: 92.3°
■ Horiz. Spread: 108.8°

PACKAGE

Case Qty 5 pcs

