

DWS WALL SCENCE

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

DESCRIPTION

naturaLED® Wall Sconce come in 10-watt, 20-watt and 25-watts to replace your existing incandescent up to 250-watt, saving up to 90% of energy. Super energy efficient and lasts up to 50,000+ hours average life. Our wall sconce lights are an ideal lighting solution for security lights, both residential, commercial and many other outdoor applications.



Rated Life 50,000 Hours
Warranty 5 Years

APPLICATIONS

Security, Accent, Residential, Outdoor, Wall Lighting

FEATURES

- Energy Star Qualified
- Wet Location
- ETL
- ColorTemp: 3000K, 5000K
- Voltage: 120-277V
- Beam Angle: 38° (10/20W) , 33° (25W)
- CRI: 80 / CRI: 90 (25W)
- Operating temperature: - 4°F - 104°F / -4° - 122° (25W)
- Up to 80% energy savings
- Instant on
- Lightweight
- No Mercury or lead
- Colors: Black, White, Nickel
- 5 Year Warranty

SAMPLE NUMBER		LED-FX5DWS25/33S/930/BK					
STYLE	FAMILY	DIAMETER	SERIES	WATTAGE	BEAM ANGLE	CRI/COLOR TEMP	COLOR
LED	FX	5	DWS	25	33S	930	BK
LED Lighting	Fixture	5 inch Diameter	Down Lights	25 Watt	33° Beam Angle	CRI 90 3000K	Black (WH) White (NI) Nickel




ORDERING


Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Size	Color	Wet Location	Energy Star
10	7026	LED-FXDWS10/830/BK	3000K	700	90	2.36"x6.7"	Black	•	•
10	7027	LED-FXDWS10/850/BK	5000K	700	90	2.36"x6.7"	Black	•	•
20	7064	LED-FXDWS20/830/BK	3000K	1,400	200	3.15"x11.7"	Black	•	•
20	7065	LED-FXDWS20/850/BK	5000K	1,400	200	3.15"x11.7"	Black	•	•
10	7068	LED-FXDWS10/830/WH	3000K	700	90	2.36"x6.7"	White	•	•
10	7069	LED-FXDWS10/850/WH	5000K	700	90	2.36"x6.7"	White	•	•
20	7071	LED-FXDWS20/850/WH	5000K	1,400	200	3.15"x11.7"	White	•	•
10	7022	LED-FXDWS10/830/NI	3000K	700	90	2.36"x6.7"	Nickel	•	•
20	7023	LED-FXDWS20/830/NI	3000K	1,400	200	3.15"x11.7"	Nickel	•	•
25	7792	LED-FX5DWS25/33S/930/BK	3000K	1,750	250	5"x7.5"	Black	•	•

DIMENSIONS


10W
1.54-lbs

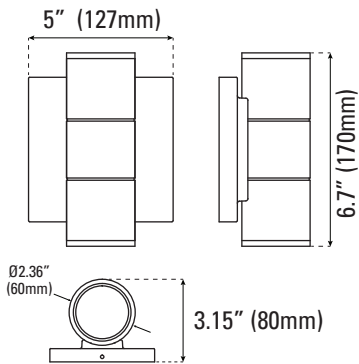

20W
2.43-lbs

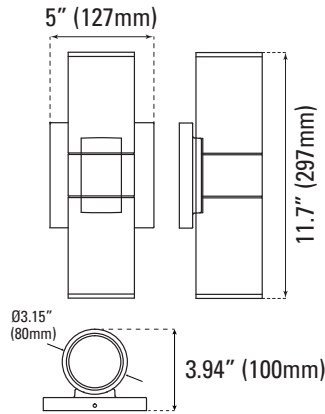


25W
3.75-lbs

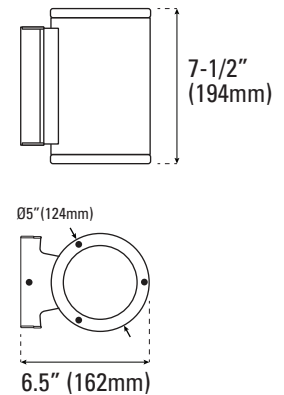

PHOTOMETRICS CHART


10 Watt
Energy Star



Center Beam Fc	Beam Width
2.5R	0.97 ft 1.2 ft 1.9 ft
5.0R	0.22 ft 3.3 ft 3.8 ft
7.5R	0.10 ft 3.5 ft 5.6 ft
10.0R	0.05 ft 4.7 ft 7.5 ft
12.5R	0.03 ft 5.8 ft 9.4 ft
15.0R	0.02 ft 7.0 ft 11.3 ft

Vert. Spread: 26.2°
Horiz. Spread: 41.2°


20 Watt
Energy Star



Center Beam Fc	Beam Width
2.5R	2.02 ft 1.0 ft 1.3 ft
5.0R	0.51 ft 2.1 ft 2.5 ft
7.5R	0.22 ft 3.1 ft 3.8 ft
10.0R	0.13 ft 4.1 ft 5.0 ft
12.5R	0.09 ft 5.2 ft 6.3 ft
15.0R	0.06 ft 6.2 ft 7.5 ft

Vert. Spread: 23.3°
Horiz. Spread: 28.2°

25 Watt
Energy Star



Center Beam Fc	Beam Width
2.5R	4.53 ft 1.4 ft 1.4 ft
5.0R	1.13 ft 2.8 ft 2.8 ft
7.5R	50.3 ft 4.2 ft 4.2 ft
10.0R	28.3 ft 5.5 ft 5.6 ft
12.5R	18.1 ft 6.9 ft 7.0 ft
15.0R	12.6 ft 8.3 ft 8.4 ft


Vert. Spread: 31.0°
Horiz. Spread: 31.1°

PACKAGE

Case Qty 10 pcs (10W)



5 pcs (20W)



4 pcs (25W)

