

# SPECIFICATION SHEET



## TL3544W

3-1/2 INCH SQUARE SERIES TRIM

WHITE PINHOLE

FIXTURE TYPE:


PROJECT:

PART NUMBER:

NOTES:

### TRIM DETAILS

#### DIMENSIONS

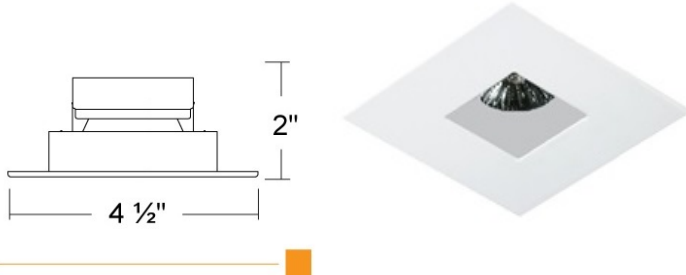

### TRIM

Trim is mounted into housing with 2 flexible trim clips. The 2 Inch aperture provides the perfect amount of light for a commercial or residential application where mounting height is between 8 to 15 foot ceiling height. The subtle beam pattern ensure light is reflected where it's required.

### CHOOSE A LAMP

Replaceable 10Watt GU10 LED

PART NUMBER:

**LEDGU10FL2700KWH90**

90+ CRI 2700K 7.5WATT  
120V DIMMABLE LED BULB  
50,000 Hrs Warranty



PART NUMBER:

**LEDGU10FL3000KWH90**

90+ CRI 3000K 7.5WATT  
120V DIMMABLE LED BULB  
50,000 Hrs Warranty



PART NUMBER:

**LEDGU10FL2700KKBK90**

90+ CRI 2700K 7.5WATT  
120V DIMMABLE LED BULB  
50,000 Hrs Warranty



PART NUMBER:

**LEDGU10FL3000KKBK90**


90+ CRI 3000K 7.5WATT  
120V DIMMABLE LED BULB  
50,000 Hrs Warranty




### CHOOSE A HOUSING

#### IC-RATED NEW CONSTRUCTION AIR-TIGHT HOUSINGS

H350LGICQA -TALL HOUSING 3-1/2 LED GU10 SERIES

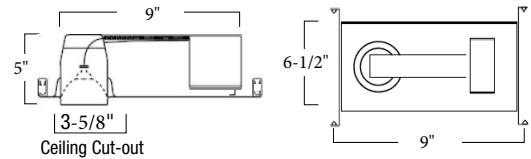


H350LGSICQA -SHALLOW HOUSING 3-1/2 LED GU10 SERIES

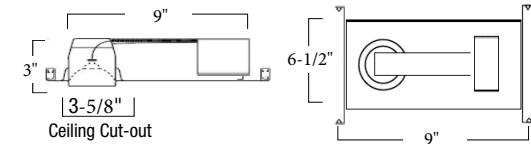


#### IC-RATED RETRO-FIT AIR-TIGHT HOUSINGS

H350LGRICQA -TALL RETRO-FIT HOUSING 3-1/2 LED GU10 SERIES

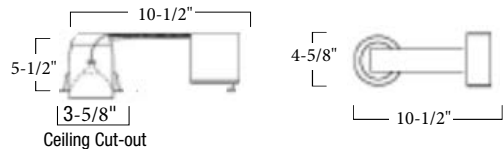

H350LGSRICQA -SHALLOW RETRO-FIT HOUSING 3-1/2 LED GU10 SERIES

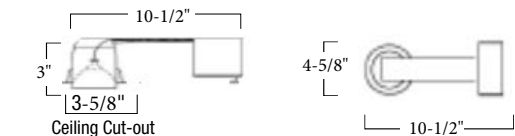

### ELECTRICAL RATINGS AND APPROVALS

cULus Rated In Canada or United States  
Washington State Approved Meets or exceeds  
ASTM-283 Air-Tight



**RATED AT 10 WATTS**

**120V**

✓ Insulated Ceilings

✓ Airtight (Some locations may require Vapor Bag)

### PART NUMBER EXAMPLE:

TL3544W-LEDGU10FL2700KWH90-H350LGICQA