
SPECIFICATION SHEET

TL3546C/W

3-1/2 INCH SQUARE SERIES TRIM WHITE MATTE RING CLEAR CHROME REFLECTOR

TRIM DETAILS

DIMENSIONS-

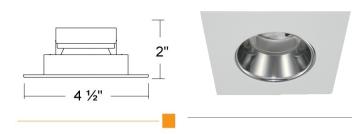

TRIM

Trim is mounted into housing with 2 flexible trim clips. The 3-1/2 Inch aperature provides the perfect amount of light for a commercial or residential application where mounting height is between 8 to 15 foot ceiling height. The subtle beam pattern ensure light is reflected where it's required.

CHOOSE A LAMP

Replaceable 10Watt GU10 LED

PART NUMBER:

LEDGU10FL2700KWH90



90+ CRI 2700K 7.5WATT 120V DIMMABLE LED BULB 50,000 Hrs Warranty

PART NUMBER:

LEDGU10FL3000KWH90



90+ CRI 3000K 7.5WATT 120V DIMMABLE LED BULB 50,000 Hrs Warranty

PART NUMBER:

LEDGU10FL2700KBK90



90+ CRI 2700K 7.5WATT 550 120V DIMMABLE LED BULB 50,000 Hrs Warranty

PART NUMBER:

LEDGU10FL3000KBK90



90+ CRI 3000K 7.5WATT 550 120V DIMMABLE LED BULB 50,000 Hrs Warranty



FIXTURE TYPE:

PROJECT:


PART NUMBER:

NOTES:


CHOOSE A HOUSING

IC-RATED NEW CONSTRUCTION AIR-TIGHT HOUSINGS

H350LGICQA -TALL HOUSING 3-1/2 LED GU10 SERIES




H350LGSICQA -SHALLOW HOUSING 3-1/2 LED GU10 SERIES




IC-RATED RETRO-FIT AIR-TIGHT HOUSINGS

H350LGRICQA -TALL RETRO-FIT HOUSING 3-1/2 LED GU10 SERIES



H350LGSRICQA -SHALLOW RETRO-FIT HOUSING 3-1/2 LED GU10 SERIES



ELECTRICAL RATINGS AND APPROVALS

cULus Rated In Canada or United States Washington State Approved Meets or exceeds ASTM-283 Air-Tight



ITFN AT 10 WATTS



✓ Insulated Ceilings

√ Airtight (Some locations may require Vapor Bag)

PART NUMBER EXAMPLE:

TL3546C/W-LEDGU10FL2700KWH90-H350LGICQA

