

Project \_\_\_\_\_  
 Schedule / Date \_\_\_\_\_  
 Notes \_\_\_\_\_  
 Catalog Number \_\_\_\_\_

**Product Description**

naturalLED® (SWP) is our slim, low-profile cutoff wall pack with the smooth contemporary design. Well-engineered, high-quality die-cast aluminum, delivering bright, crisp light. The excellent thermal design ensures our SWP's performance over rated life. Installation is made simple and easy with a hinged junction box. Our Slim Wall Packs are available in 15W, 29W and 50W with color options of White, Black and Bronze. Optional ¾" knuckle-mount, adjustable swivel bracket or slip fitter provides you the flexibility for your application. SWP is ideal for landscape, wall/surface, low-level pathway, apartment buildings, schools and multi-use facilities.



**Features & Benefits**

- ▶ DLC Certified
- ▶ IP 65 Rated
- ▶ ADA Certified
- ▶ Uniform and consistent color
- ▶ Excellent thermal design
- ▶ Aluminum die cast housing
- ▶ Photocell sensor compatible
- ▶ Material: Aluminum cast housing

**Specifications**

- ▶ Input line voltage: 120-277
- ▶ CRI: 70
- ▶ Powerfactor >0.9
- ▶ Beam Angle: 110°
- ▶ Operating temperature: -4°F ~ 122°F

**Applications**

- ▶ Security Lighting
- ▶ Pathway Lighting
- ▶ Perimeter Lighting
- ▶ Entryway Lighting

**Accessories (Available in Bronze, Black, and White)**

- ▶ Slip Fitter
- ▶ Swivel Bracket
- ▶ Knuckle Mount

Slip Fitter



Swivel Bracket







Knuckle Mount



**Color Choices**



Ordering Information

Code	Description	CCT	Watt	Lumen	Equiv Wattage	Voltage	Size	Color	Rated Hrs				
7462	LED-FXSWP15/40K/BK	4000K	15	1,740	75	120-277	4" Depth	Black	50,000	•	•	•	•
7463	LED-FXSWP15/50K/BK	5000K	15	1,797	75	120-277	4" Depth	Black	50,000	•	•	•	•
7452	LED-FXSWP29/40K/BK	4000K	29	3,268	175	120-277	4" Depth	Black	50,000	•	•	•	•
7453	LED-FXSWP29/50K/BK	5000K	29	3,329	175	120-277	4" Depth	Black	50,000	•	•	•	•
7548	LED-FXSWP50/40K/BK	4000K	50	5,508	250	120-277	4" Depth	Black	50,000		•	•	•
7549	LED-FXSWP50/50K/BK	5000K	50	5,856	250	120-277	4" Depth	Black	50,000		•	•	•
7464	LED-FXSWP15/40K/WH	4000K	15	1,740	75	120-277	4" Depth	White	50,000	•	•	•	•
7465	LED-FXSWP15/50K/WH	5000K	15	1,797	75	120-277	4" Depth	White	50,000	•	•	•	•
7460	LED-FXSWP29/40K/WH	4000K	29	3,268	175	120-277	4" Depth	White	50,000	•	•	•	•
7461	LED-FXSWP29/50K/WH	5000K	29	3,329	175	120-277	4" Depth	White	50,000	•	•	•	•
7550	LED-FXSWP50/40K/WH	4000K	50	5,508	250	120-277	4" Depth	White	50,000		•	•	•
7551	LED-FXSWP50/50K/WH	5000K	50	5,856	250	120-277	4" Depth	White	50,000		•	•	•
7572	LED-FXSWP15/40K/DB	4000K	15	1,740	75	120-277	4" Depth	D.Bronze	50,000	•	•	•	•
7573	LED-FXSWP15/50K/DB	5000K	15	1,797	75	120-277	4" Depth	D.Bronze	50,000	•	•	•	•
7574	LED-FXSWP29/40K/DB	4000K	29	3,268	175	120-277	4" Depth	D.Bronze	50,000	•	•	•	•
7575	LED-FXSWP29/50K/DB	5000K	29	3,329	175	120-277	4" Depth	D.Bronze	50,000	•	•	•	•
7576	LED-FXSWP50/40K/DB	4000K	50	5,508	250	120-277	4" Depth	D.Bronze	50,000		•	•	•
7577	LED-FXSWP50/50K/DB	5000K	50	5,856	250	120-277	4" Depth	D.Bronze	50,000		•	•	•

Accessories (Available for purchase)

SF



P10076	MT-SF-SWP/DB	Slip Fitter Dark Bronze
P10007	MT-SF-SWP/BK	Slip Fitter Black
P10021	MT-SF-SWP/WH	Slip Fitter White

SB



P10074	MT-SB-SWP/DB	Swivel Bracket Dark Bronze
P10005	MT-SB-SWP/BK	Swivel Bracket Black
P10019	MT-SB-SWP/WH	Swivel Bracket White

Knuckle Mount



P10075	MT-KNC-SWP/DB	3/4" NPT Knuckle Mount Dark Bronze
P10006	MT-KNC-SWP/BK	3/4" NPT Knuckle Mount Black
P10020	MT-KNC-SWP/WH	3/4" NPT Knuckle Mount White

Photocell




P10036	SEN-PHO-BT-MT/MV	Button Photocell (120-277V)
--------	------------------	-----------------------------

\*not compatible for #7549 LED-FXSWP50/50K/BK

Photometric Data


15 Watt

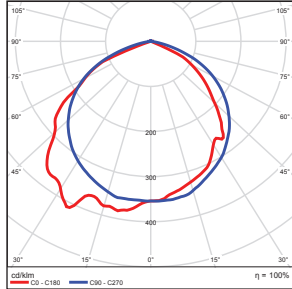


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	499.51	28.70
0-40	833.73	47.90
0-60	1488.04	85.50
60-80	247.67	14.20
70-80	50.72	2.90
90-120	0.41	0.00
90-180	1.70	0.10
0-180	1740.13	100.00

Total Luminaire Efficiency = 100.00%

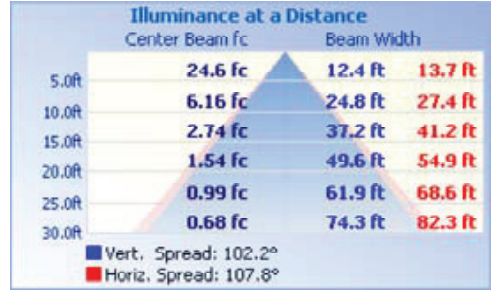


29 Watt

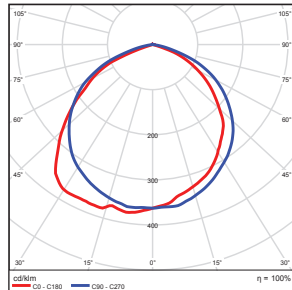


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	944.93	28.90
0-40	1570.71	48.00
0-60	2780.44	85.00
60-80	480.97	14.70
70-80	107.59	3.30
90-120	0.85	0.00
90-180	3.31	0.10
0-180	3270.7	100.00

Total Luminaire Efficiency = 100.00%

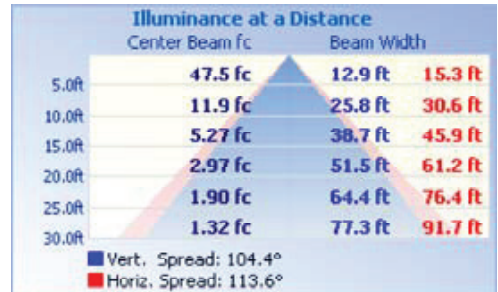


50 Watt

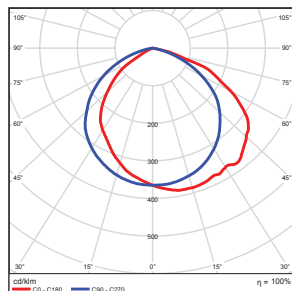

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	1583.76	28.70
0-40	2620.58	47.60
0-60	4672.85	84.80
60-80	825.93	15.00
70-80	212.02	3.80
90-120	0.02	0.00
90-180	0.03	0.00
0-180	5510.81	100.00


Total Luminaire Efficiency = 100.00%

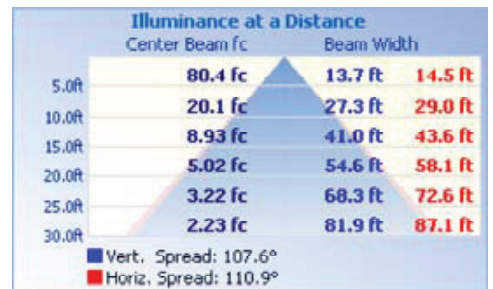

Product Dimension


SWP

Weight: 5.45-lbs

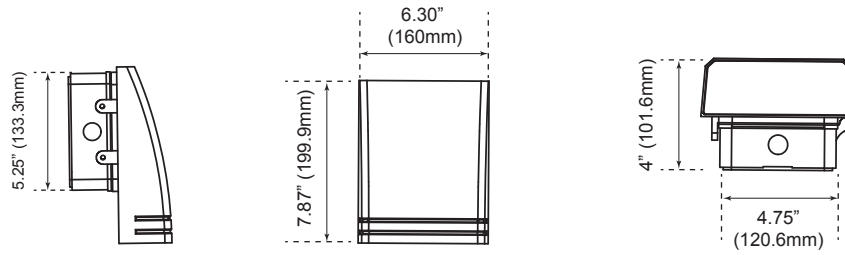

\* Applies to ADA (Americans with Disabilities Act) Standard

Mounting Accessories

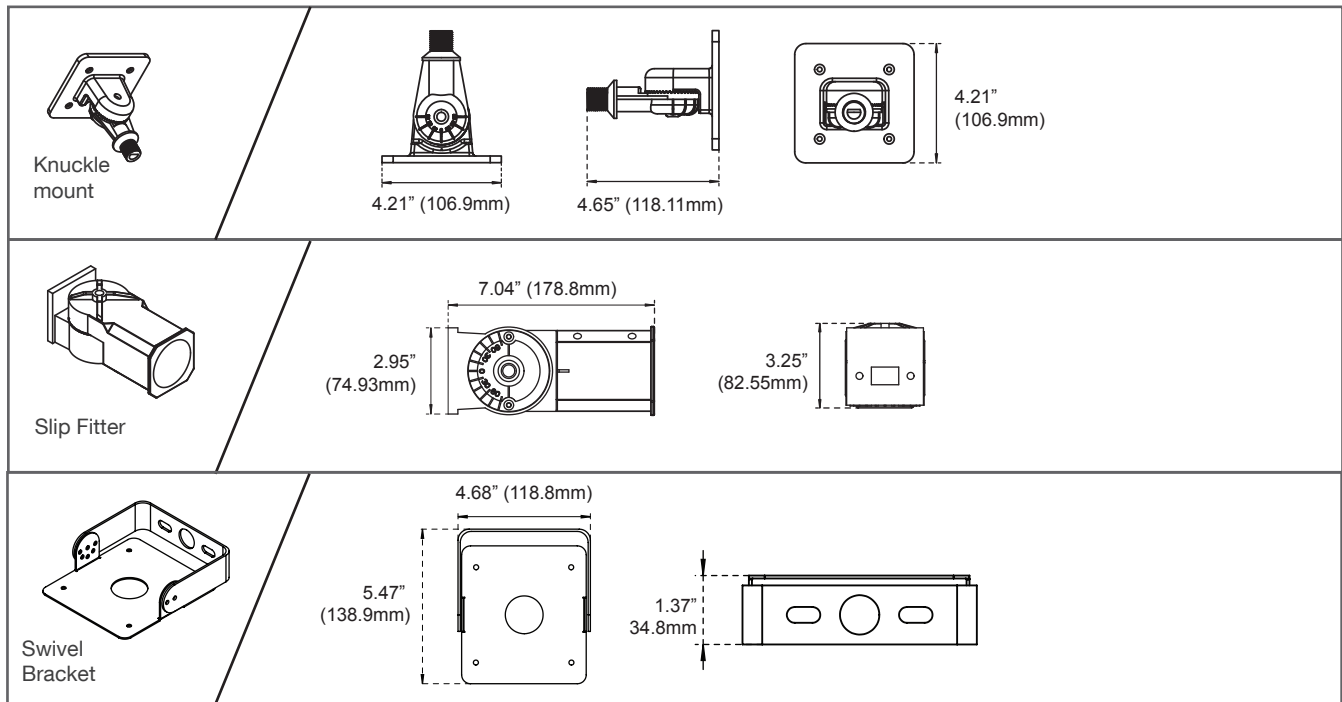

Package

