

Project	
Schedule	Date
Notes	

**DESCRIPTION**


NaturalLED® LED Vapor Tight Jelly Jar (VTJ) are designed to replace incandescent and CFL fixtures with long-lasting illumination over doorways, scaffolding, construction sites, and many more applications. Our naturalLED® LED Vapor Tight Jelly Jars are IP65 Rated against ingress of dust, pressurized water and harsh environments. Constructed with cast aluminum housing and glass lens. Available in two different mounting options: ceiling and wall, 65% less energy and zero maintenance cost for up to 50,000+ average life hours.



**FEATURES**

- Energy Star Qualified
- L70 Rated Chip for over 100,000 projected life hours
- IP65 Rated / UL 1598 for use in wet locations
- Frosted glass diffuser provides you glare-free light
- High efficacy with 90 lumen per watt
- High-temperature silicone gasket protects against moisture and dust
- Surge protection: 2KV
- Material: Die-Cast Aluminum / Glass
- Four 1/2" conduit entries for easy wiring
- Input line voltage: 120-277V
- Operating temperature: -4°F - 122°F

**REPLACEMENT SAVINGS**

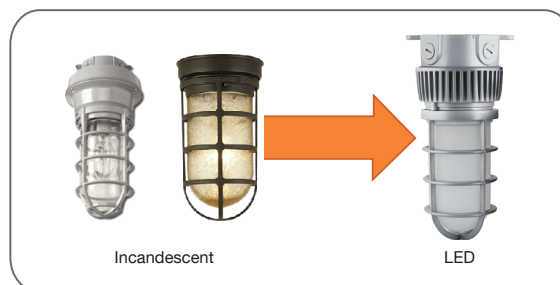

Replace Incandescent and CFL with LED

**APPLICATIONS**

- Security Lighting
- Doorway
- Scaffolding Lighting
- Construction Sites Lighting
- Fire Hydrants

**WARRANTY**

- 5 Year Warranty

Ordering Information		EXAMPLE: LED-FXVTJ20/830/MV-WM		
LED	FXVTJ	20	830	MV-WM
	Category	Wattage	Color Temp/ CRI	Mounting
LED	FXVTJ Vapor Tight Jelly Jar	20 20 Watt	8 CRI80 30 3000K	WM Wall Mount CM Ceiling Mount


ORDERING

Watts (W)	Ordering Code	Description	Color Temp (K)	Lumens (lm)	Equiv. Wattage (HID/Incandescent)	Mount	Voltage	Rated Hrs	IP65 Rated	Energy Star
20	7604	LED-FXVTJ20/830/MV-WM	3000K	1,700	150	Wall	120-277	50,000	•	•
20	7605	LED-FXVTJ20/840/MV-WM	4000K	1,700	150	Wall	120-277	50,000	•	•
20	7606	LED-FXVTJ20/830/MV-CM	3000K	1,700	150	Ceiling	120-277	50,000	•	•
20	7607	LED-FXVTJ20/840/MV-CM	4000K	1,700	150	Ceiling	120-277	50,000	•	•

SPECIFICATIONS


20W-Wall Mount

Weight: 3.80-lbs

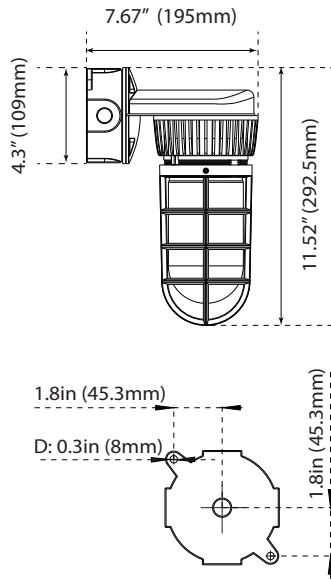

20W-Ceiling Mount


Weight: 3.80-lbs

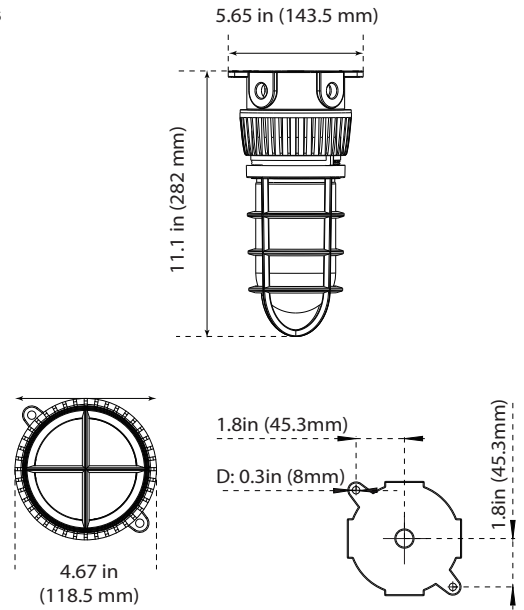

PHOTOMETRICS CHART

VTJ 20W (Wall Mount)

Energy Star

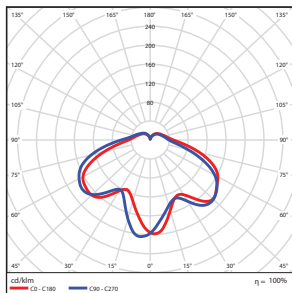


**Illuminance at a Distance**

Center Beam fc	Beam Width	
2.5R	59.6 fc	20.4 ft 20.3 ft
5.0R	14.9 fc	40.8 ft 40.7 ft
7.5R	6.62 fc	61.2 ft 61.0 ft
10.0R	3.73 fc	81.6 ft 81.4 ft
12.5R	2.38 fc	102.0 ft 101.7 ft
15.0R	1.66 fc	122.4 ft 122.0 ft

Vert. Spread: 152.5°  
 Horiz. Spread: 152.4°

VTJ 20W (Ceiling Mount)

Energy Star

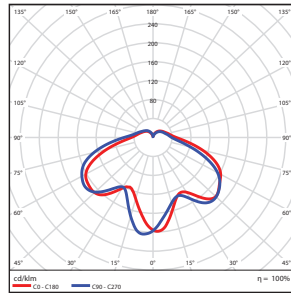

**Illuminance at a Distance**

Center Beam fc	Beam Width	
2.5R	59.6 fc	20.4 ft 20.3 ft
5.0R	14.9 fc	40.8 ft 40.7 ft
7.5R	6.62 fc	61.2 ft 61.0 ft
10.0R	3.73 fc	81.6 ft 81.4 ft
12.5R	2.38 fc	102.0 ft 101.7 ft
15.0R	1.66 fc	122.4 ft 122.0 ft

Vert. Spread: 152.5°  
 Horiz. Spread: 152.4°

PACKAGE

Master Pack: 2 pcs

