
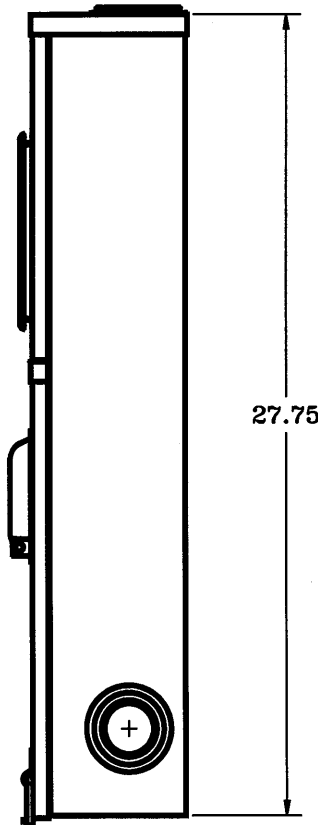


HUB OPENING  
2-1/2 INCH  
c/w CLOSURE  
PLATE

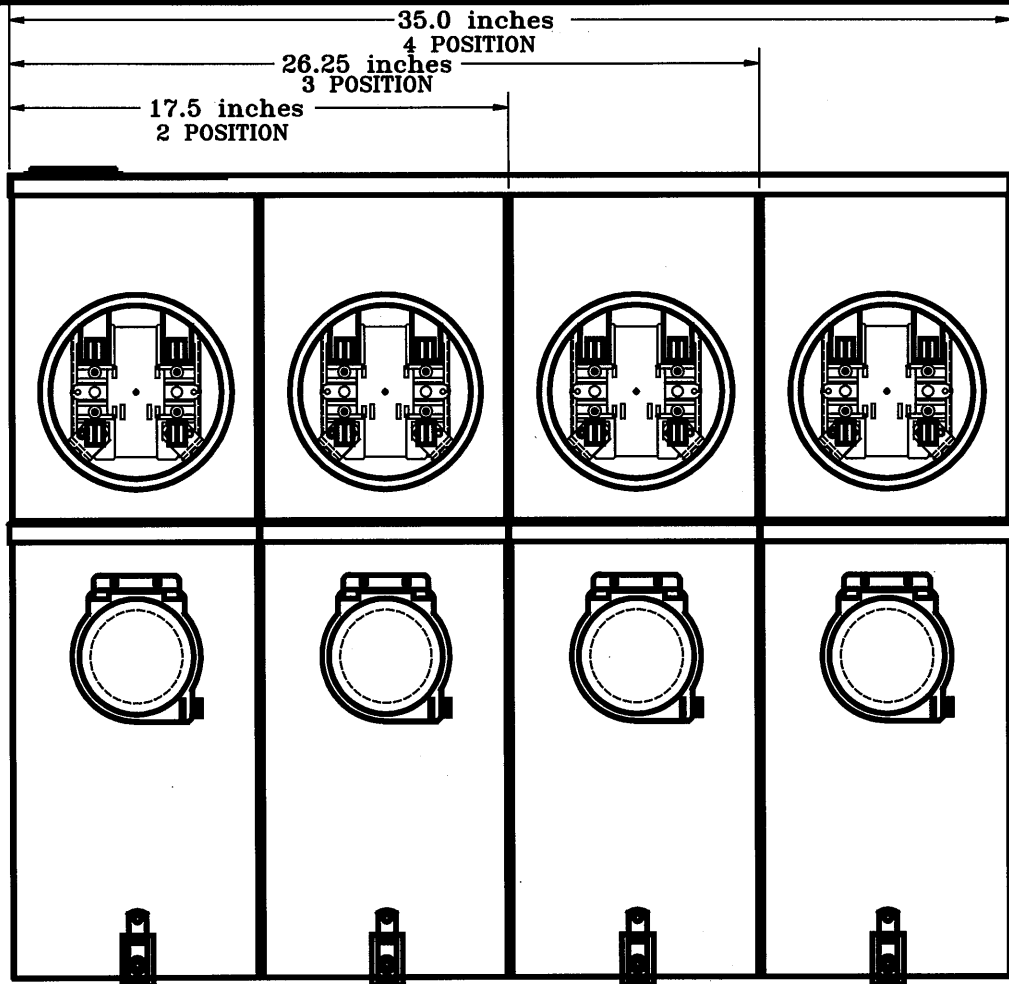

TRADE SIZE KNOCKOUT  
1/2 INCH QTY.2

RATING: 200 AMP MAIN 240V MAX.  
200 AMP PER POSITION BREAKER GE 200A 240V  
LINE LUGS -250MCM-6, LOAD LUGS - 250MCM-6  
INSULATED NEUTRAL GROUNDED c/w BRASS SCREW  
FOR OVERHEAD SERVICE ONLY

TRADE SIZE KNOCKOUTS  
1-1/4, 1-1/2, 2, 2-1/2 INCH  
QTY.4 2 POS. QTY.5 3POS. QTY.6 4POS.

REV	DATE	CHANGE
DO NOT SCALE		
SCALE:	ALL DIMENSIONS ARE IN INCHES UNLESS NOTED	
DRN BY: <b>PJS</b>	DATE: <b>MAY 10/18</b>	
APP'D BY: <i>[Signature]</i>	DATE:	

<b>HE</b>	
HYDEL ENTERPRISES DIVISION OF CIRCA METALS INC. 206 GREAT GULF DRIVE, VAUGHAN	
REV.	SHEET OF
DESCRIPTION 200A MAIN-200A/POS MULTI-CANG COND. METER SOCKET/BREAKER	
PART NO. <b>JA22R-24R</b>	
DWG. NO. <b>JA20R</b>	