



# SDC Series



## 100 AMP - MULTI POSITION 200 Amp Mains c/w Blank Compartment

| CATALOGUE #     | TYPE      | DESCRIPTION                                | DIMENSIONS (IN.) |                                |   | WEIGHT  |
|-----------------|-----------|--|------------------|--------------------------------|---|---------|
|                 |           |  | H                | W                              | D |         |
| <b>SDC220PW</b> | O/H & U/G | 2 gang, c/w blank compartment on left side | 12               | 22 <sup>1</sup> / <sub>2</sub> | 5 | 24 lbs. |
| <b>SDC320PW</b> | O/H & U/G | 3 gang, c/w blank compartment on left side | 12               | 30                             | 5 | 32 lbs. |
| <b>SDC420PW</b> | O/H & U/G | 4 gang, c/w blank compartment on left side | 12               | 37 <sup>1</sup> / <sub>2</sub> | 5 | 40 lbs. |
| <b>SDC520PW</b> | O/H & U/G | 5 gang, c/w blank compartment on left side | 12               | 45                             | 5 | 47 lbs. |
| <b>SDC620PW</b> | O/H & U/G | 6 gang, c/w blank compartment on left side | 12               | 52                             | 5 | 56 lbs. |

- Factory Bussed - 200 Amp mains
- 2 - 6 position horizontal
- 4 Jaw meter sockets
- 100 Amp - 600 VOLTS per position
- Approved conductor range:  
Line No. 6-250 MCM CU/AL  
Load No. 6-1/0 AWG CU/AL
- Approved for overhead or underground use

- Field adaptable accessories
- 5th Jaw at 9 O'clock - **SXK503**
- For overhead order **SXC** hub separate
- Add suffix "RH" for right hand entry
- Add suffix "BC" for c/w 1 - 3" KO in the bottom

| KNOCKOUT CODE | CONDUIT SIZE   |
|---------------|--|
| <b>D</b>      | 1 <sup>1</sup> / <sub>4</sub> ", 1 <sup>1</sup> / <sub>2</sub> ", 2"   |
| <b>F</b>      | 1, 1 <sup>1</sup> / <sub>4</sub> ", 1 <sup>1</sup> / <sub>2</sub> ", 2", 2 <sup>1</sup> / <sub>2</sub> ", 3" |
| <b>AA</b>     | 1 <sup>1</sup> / <sub>2</sub> "  |

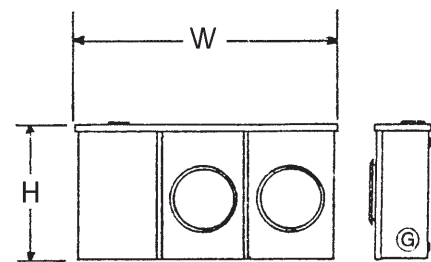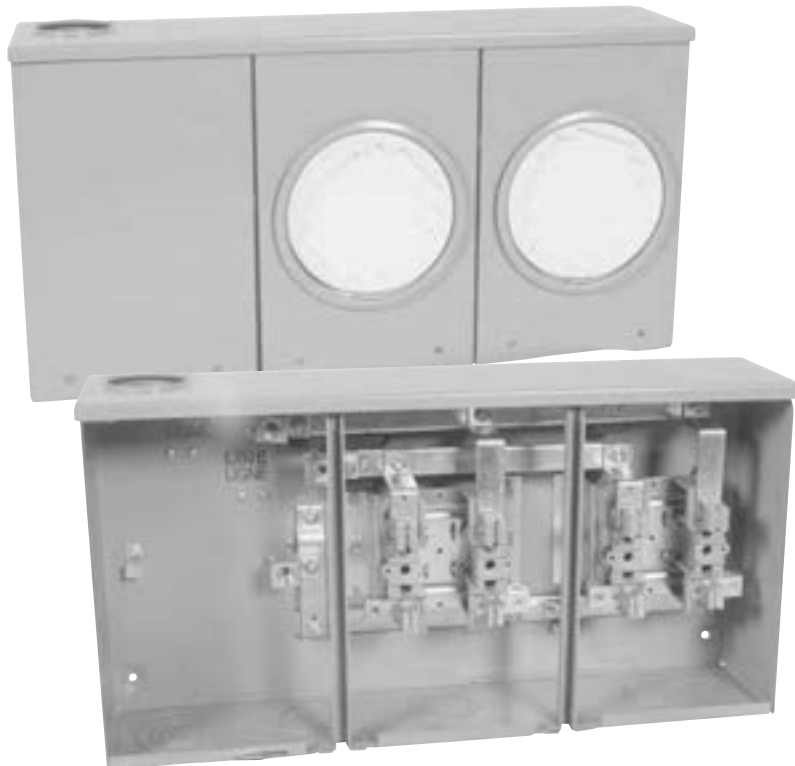

Extra Wiring Compartment

