



PROFESSIONAL  
OUTDOOR LIGHTING

## SPECIFICATION SHEET

Type:

Model:

Project:

### MODEL 5280 Landscape Series • In-Ground & Well Lights

#### FIXTURE SPECIFICATIONS:

##### HOUSING:

Injection-molded, glass-reinforced Ryton® R-4 composite for strength & high UV stability – warranted for ten years against corrosion, suspended inside a 6" black ABS well.

##### LENS COVER:

Injection-molded, glass-reinforced Ryton® R-4 composite fitted to housing with a silicone O-ring gasket – providing a superior weather-tight seal.

##### FINISH:

Polyester powder-coat finish available in Black, Verde, Architectural Brick, Light Bronze, Dark Bronze, Granite, Pewter, Terracotta, Rust, Hunter Green, Mocha, Weathered Bronze, Weathered Iron, and White.

##### SOCKET/LAMP HOLDER:

Top grade ceramic socket with nickel contacts, stainless steel springs, & Teflon-jacketed wire leads.

##### LENS:

Clear, tempered, shock & heat-resistant, soda-lime glass lens- crowned (convex) to promote water runoff. Optical effect lenses are available; see accessories column on fixture ordering information chart.

##### LAMP TYPE:

MR-16 Halogen – 50W maximum. LN-20 BAB/FG (20W) Standard.

##### OPTICS/AIMING:

Adjustable lamp bracket provides up to  $\pm 25^\circ$  of tilt as well as  $360^\circ$

rotation of housing for precise beam control. Lamp bracket can be locked into place to prevent disrupting lamp position when relamping. Housing bracket within ABS well provides up to  $\pm 45^\circ$  of tilt in addition to lamp bracket.

##### MOUNTING:

In-grade installation.

##### FASTENERS/INSERTS:

All fasteners are stainless steel with brass inserts.

##### WIRING:


Prewired with a three-foot pigtail of 18-2 direct-burial cable & underground connectors for a secure connection to supply cable.

##### CERTIFICATION:

UL Listed to U.S. & Canadian safety standards for low voltage landscape luminaires (UL 1838). Maximum wattages allowed by Underwriters Laboratories (UL) for U.S. & Canadian markets may vary. Maximum wattages specified are Underwriters Laboratories U.S. standard. Please contact Vista for any questions about maximum wattages allowed by UL Canadian standards. This luminaire has an ingress protection rating of IP67 for protection against detrimental dust intrusion as well as penetration of water under submersion.

All Vista luminaires are **MADE IN U.S.A.**

#### DIMENSIONS:

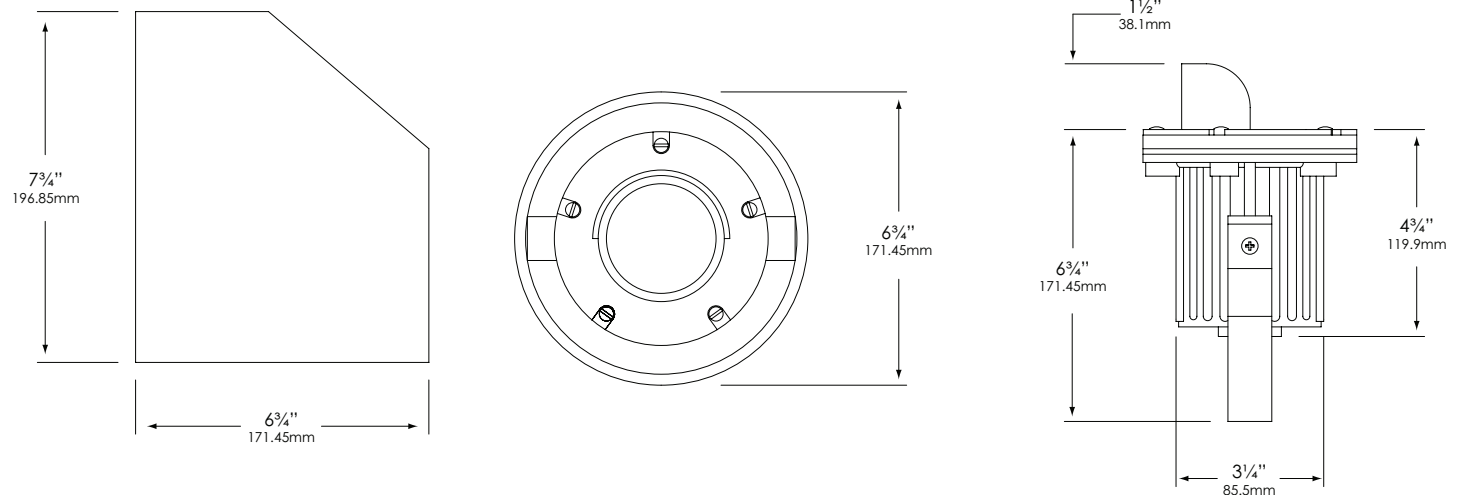

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



PROFESSIONAL  
OUTDOOR LIGHTING

## SPECIFICATION SHEET

### MODEL 5280 Landscape Series • In-Ground & Well Lights

#### FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

**EXAMPLE: GW-5280-B-BAB/FG-SL**

| MOUNTING     | MODEL | FINISH  | LAMP   | ACCESSORIES  |
|--------------|-------|---|--|--|
| GW- In-grade | 5280  | B- Black<br>G- Verde<br>BR- Architectural Brick<br>LZ - Light Bronze<br>DZ - Dark Bronze<br>GT- Granite<br>P- Pewter<br>TC- Terracotta<br>R- Rust<br>HG- Hunter Green<br>M- Mocha<br>WB- Weathered Bronze<br>WI- Weathered Iron<br>W- White | BAB/FG - 20W<br><br>MR-16 Halogen<br>50W maximum<br>LN-20 BAB/FG (20W) Standard<br><br>(Please see lamp order code<br>column on lamp guide, Vista<br>product catalog.) | CBL - Crowned Cool Blue lens<br>CFR - Crowned Frosted lens<br>SL- Flat Spread lens<br>DBL- Flat Dark Blue lens<br>GL- Flat Dark Green lens<br>RL- Flat Red lens<br>YL- Flat Amber lens<br>HL- Honeycomb louver |

Fixtures shipped with standard lamp, unless otherwise specified.

Fixtures shipped with specified mounting hardware.

*Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.*