

Mini Circuit Breaker

QP 125A Frame Circuit Breaker

1 - 2 and 3-pole; 10A -125A



Q120



Q220



Q320

Catalog Numbers

Amperage	Poles	QP	QPH	HQP
10	1	Q110	-	-
15	1	Q115 ①	Q115H ①	Q115HH ①
20	1	Q120 ①	Q120H ①	Q120HH ①
25	1	Q125	Q125H	Q125HH
30	1	Q130	Q130H	Q130HH
40	1	Q140	Q140H	Q140HH
45	1	Q145	Q145H	Q145HH
50	1	Q150	Q150H	Q150HH
60	1	Q160	Q160H	Q160HH
70	1	Q170	Q170H	Q170HH
Amperage	Poles	QP	QPH	HQP
10	2	Q210	-	-
15	2	Q215	Q215H	Q215HH
20	2	Q220	Q220H	Q220HH
25	2	Q225	Q225H	Q225HH
30	2	Q230	Q230H	Q230HH
40	2	Q240	Q240H	Q240HH
45	2	Q245	Q245H	Q245HH
50	2	Q250	Q250H	Q250HH
60	2	Q260	Q260H	Q260HH
70	2	Q270	Q270H	Q270HH
80	2	Q280	Q280H	Q280HH
90	2	Q290	Q290H	Q290HH
100	2	Q2100	Q2100H	Q2100HH
110	2	Q2110	Q2110H	Q2110HH
125	2	Q2125	Q2125H	Q2125HH

UL 489 Interrupting Ratings

Breaker Type	UL A.I.R. (kA) RMS Symmetrical Amperes Volts AC (50/60 Hz)		
	120	120/240	240
QP	10	10	-
	-	-	10
	-	10	-
	-	-	10
QPH	22	22	-
	-	22	-
	-	-	22
HQP	65	65	-
	-	65	-
	-	-	65

Standards:

UL 489
CSA C22.2 NO. 5-16
NMX-J-266-ANCE

Amperage	Poles	QP	QPH	HQP
15	2	Q215R	-	-
20	2	Q220R	-	-
25	2	Q225R	-	-
30	2	Q230R	-	-
40	2	Q240R	-	-
45	2	Q245R	-	-
50	2	Q250R	-	-
Amperage	Poles	QP	QPH	HQP
15	3	Q315	Q315H	Q315HH
20	3	Q320	Q320H	Q320HH
25	3	Q325	Q325H	Q325HH
30	3	Q330	Q330H	Q330HH
40	3	Q340	Q340H	Q340HH
45	3	Q345	Q345H	Q345HH
50	3	Q350	Q350H	Q350HH
60	3	Q360	Q360H	Q360HH
70	3	Q370	Q370H	Q370HH
80	3	Q380	Q380H	Q380HH
90	3	Q390	Q390H	Q390HH
100	3	Q3100	Q3100H	Q3100HH

① UL Listed for frequent switching applications (SWD).

All QP, QPH and HQP are UL listed for use with 60/75° wire through 40 amps, UL listed for use with 75° wire only for 50 amps and above, HACR rated.

Special Application Breakers

Type	Amperage	Poles	Catalog Number
HID	15	1	Q115HID
	20	1	Q120HID
	30	1	Q130HID
	15	2	Q215HID
	20	2	Q220HID
	30	2	Q230HID
Molded Case Switch	100	1	Q1100S
	30	2	Q230S
	50	2	Q250S
	60	2	Q260S
	125	2	Q2125S
No-Noise	50	2	Q250NN
	60	2	Q260NN
Switching Neutrals	15	2	QG215
	20	2	QG220
	20	3	QG320

External Accessories

Description	Catalog Number	No. of Poles
Padlocking Device	ECPLD1	1
	ECPLD1R	1
	ECPLD2	2
	ECPLD2R	2
	ECPLD3	3
	ECPLD3R	3
	ECQLD4	1
	ECQTH4	Designed for (3) 1P Breakers
Handle Tie	ECQTH2	1
	ECQTH3	2
Handle Blocking Device	ECQTH2	1
	ECQTH3	1

Shunt Trip

Description	Catalog Number	Field/Factory Installed
120VAC	add suffix...00S01	Factory
24VAC	add suffix...00S07	Factory

Auxiliary Switch

Description	Catalog Number	Field/Factory Installed
120VAC	add suffix...01	Factory


Description	Catalog Number
non-UL 50C calibration	add suffix...M
400 Hz Calibration ①	add suffix...Y
Fungus Proofing	add suffix...F

① UL listed 5kA max A.I.R.

Pressure Wire Connectors

Load Side terminal factory installed only

Breaker Type	Ampere Rating	Cables per Lug	No. of Poles	Wire Range
QP, QPH & HQP	15 - 20	1	1, 2, 3	#14 - #10 AWG Cu
		1	1, 2, 3	#12 - #10 AWG Al.
	25 - 35	1	1, 2, 3	#10 - #8 AWG Cu.
		1	1, 2, 3	#10 - #6 AWG Al.
	40 - 50	1	1, 2, 3	#8 - #6 AWG Cu.
		1	1, 2, 3	#8 - #4 AWG Al.
QP	55 - 60	1	1, 2	#6 - #4 AWG Cu.
		1	1, 2	#6 - #4 AWG Al.
	55 - 60	1	3	#6 - #3 AWG Cu.
		1	3	#6 - #3 AWG Al.
QPH & HQP	55 - 60	1	1, 2, 3	#6 - #3 AWG Cu.
		1	1, 2, 3	#6 - #3 AWG Al.
QP, QPH & HQP	70 - 100	1	1, 2, 3	#4 - #3 AWG Cu.
		1	1, 2, 3	#3 - #1 AWG Al.
	110 - 125	1	2	#2 - #1/0 AWG Cu.
1		2	#1/0 - #2/0 AWG Al.	

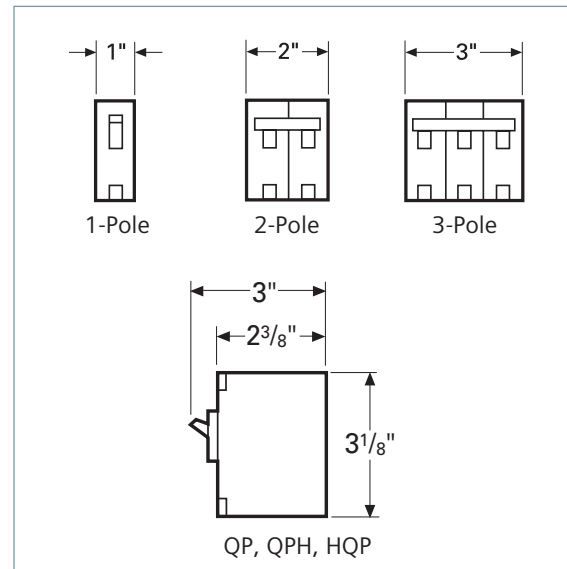

**Published by
Siemens 2020**

Siemens Industry, Inc.
3617 Parkway Ln.
Peachtree Corners, GA 30092

Siemens Technical Support: 1-800-333-7421
info.us@siemens.com

Printed in USA-CP
Order No. RPDS-QP125-1020
All Rights Reserved
© 2020, Siemens Industry, Inc.
usa.siemens.com/resibreakers

The technical data presented in this document is based on an actual case or on as-designed parameters, and therefore should not be relied upon for any specific application and does not constitute a performance guarantee for any projects. Actual results are dependent on variable conditions. Accordingly, Siemens does not make representations, warranties, or assurances as to the accuracy, currency or completeness of the content contained herein. If requested, we will provide specific technical data or specifications with respect to any customer's particular applications. Our company is constantly involved in engineering and development. For that reason, we reserve the right to modify, at any time, the technology and product specifications contained herein.