




Can-TWIST™ Wire Connectors

The new Canadian Standard in wire connectors,
Can-Twist is the only one you'll ever need.

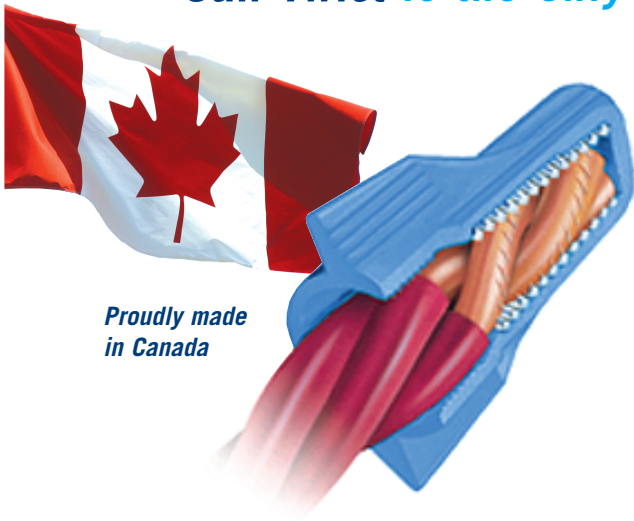

Proudly made
in Canada

- Exceptional wire-range capacity – handles wire combinations from 22 to 8 AWG solid and/or stranded wires
- Spring threads are heat-set making them more reliable
- Flexible walls show when wires are firmly connected
- Easily removed for repeat usage
- Extended skirt length provides over-strip protection
- Smaller size makes it easier to work in tight spaces
- Wide mouth and square springs deliver quick pick-up
- Swept wings provide added gripping power
- Easier to twist. Only a few turns are necessary to achieve torque
- CSA 22.2#188 Certified



Can-Twist
105°C/ 221°F




Can-Twist XT
150°C/ 302°F

MODEL	COLOUR	WIRE COMBINATION (AWG)	WIRE COMBINATION (MM)	QUANTITY	CAT. NO.
Can-Twist 007	Blue	600V No. 22 thru 8 AWG Min. 3 No. 22 Max. 3 No. 10	600V .64mm DIA to 3.26mm DIA Min. .97mm ² Max. 15.78mm ²	Jar of 70	30-007J
				C-Pak of 100	30-207
				Jar of 175	30-107J
				Jar of 475	30-307J
				Bag of 500 (Keg of 10000)	30-607
				Jar of 1000	30-707J
Can-Twist 007XT	Black	600V No. 22 thru 8 AWG Min. 3 No. 22 Max. 4 No. 12 (solid)	600V .64mm DIA to 3.26mm DIA Min. .97mm ² Max. 13.24mm ²	Barrel of 25000	30-807
				C-Pack of 100	30-207XT
				Jar of 175	30-107XTJ
				Jar of 475	30-307XTJ
				Barrel of 25000	30-807XT

Can-Twist 007	3#22 1,920 (.97mm ²)	3#14 12,330 (6.24mm ²)	3#10 31,140 (15.78mm ²)
Combination CIR MIL Area			
Can-Twist 007XT	3#22 1,920 (.97mm ²)	3#14 12,330 (6.24mm ²)	4#12 26,120 (13.44mm ²)

Dimensions for Model Can-Twist 007/007XT

DIMENSIONS	A	B	C	D	E
Inches	1/4	7/16	3/4	7/16	1 1/8
mm	7	11.5	19	11.5	29



Cu/Cu
Only



P-1963

12/05