
3" INGROUND 12V COLOR CHANGING



5031-CCBBR

LANDSCAPE LIGHTING





Fixture Type:	
Catalog Number:	
	•
Project:	
Location:	

PRODUCT DESCRIPTION

Landscape Wall Wash luminaire

FEATURES

- Color and brightness are controlled through ilumenight app
- Adjustable beam angle
- Integral dimmer
- IP67 rated, Protected from temporary immersion under water
- Drive over up to 4500lbs
- Solid diecast brass housing
- Available concrete pour kit
- 6' lead wire and direct burial gel filled wire nuts included
- Maintains constant lumen output against voltage drop
- UL 1838 Listed
- Not suitable to use with external dimmers

SPECIFICATIONS

Input: 9V - 15VAC (Transformer is required)
Power: 0.5W to 14.5W / 1VA to 17VA

 Brightness:
 Up to 250 lm

 Beam Angle:
 15° to 60°

 CRI:
 95+

 Rated Life:
 45,000 hours

Controls: Bluetooth v4.0 - Configured with ilumenight[™] iOS

App for localized

(within 150ft line of sight) groups of 8 luminaires or

ess.

Control detection can be adversely affected high wire-

less signal interference environments.

ORDERING NUMBER

		Color Temp		Finish	
5031	3" Inground 12V	cc	Color Changing	BBR	Bronze on Brass

IEC safety Standard	Walk over	Drive over
Resistance to static load test	Yes (1125lbs)	Yes (4496lbs)
Resistance to torque and shear loads test	N/A	Yes

5031-CCBBR

Module Replacement

Color Changing M5031FLE-CCBZ



waclighting.com Phone (800) 526.2588 Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive Port Washington, NY 11050 Central Distribution Center 1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760


3" INGROUND 12V COLOR CHANGING

causing light pollution



5031-CCBBR

LANDSCAPE LIGHTING

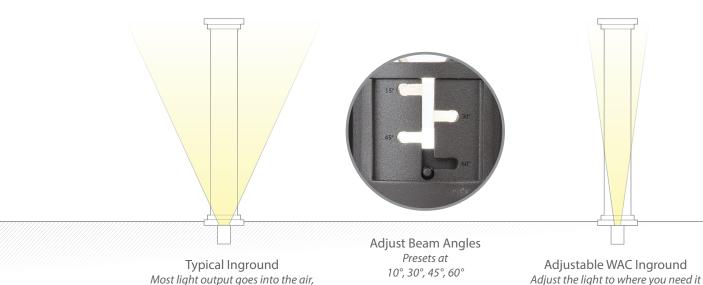

3" INGROUND 12V COLOR CHANGING



5031-CCBBR

LANDSCAPE LIGHTING

Rock Guard

Protects the fixture face



5030-GRD-BZBronze on Aluminum

5030-GRD-BBRBronze on Brass

Honeycomb Louver



LENS-25-HCL *Reduces glare*


Concrete Pour Kit

For installation in concrete
Five ½" NPT threaded holes, PVC

5030-PIP-PVC

Shown with temporary dense foam cap





Magnetic Transformers

Stainless Steel, 12-15V output, IP65 rated, UL 1838 listed See transformer spec sheet for details and its accessories

9075-TRN-SS *75W Max*

9150-TRN-SS *150W Max*

9300-TRN-SS 300W Max

9600-TRN-SS 600W Max

