


## ORDERING INFORMATION

Order code: 61064  
 Description: E432T8PS347/N/AS/BULK  
 UPC: 69549610644

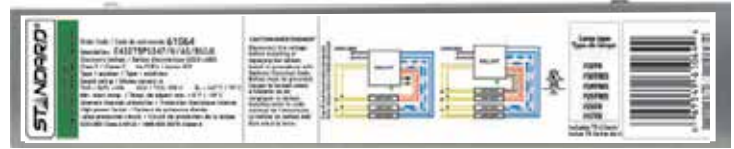

## SPECIFICATIONS

**Ballast type:** Electronic  
**Starting method:** Program Start  
**Lamp connection:** Parallel  
**Input voltage (V):** 347  
**Input frequency (Hz):** 50/60  
**Max. case temperature:** 75 °C  
**Thermal protection:** Class P

**Type:** 1 Outdoor  
**Contains PCBs:** No  
**Sound rating:** A  
**Open current voltage (OCV) (V):** 550  
**Inherent thermal protection:** Yes  
**Lamp protection circuit:** Yes  
**ICES-005 Compliant:** Class A RFLD  
**Auto-restrike:** Yes



Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD (%)	Power factor	Max. lamp current crest factor	B.E.F.
<b>347 VOLTS</b>										
F32T8 (32W)	4	32	0/-18	0.32	110	0.88	10	0.99	1.7	0.80
F32T8/ES (30W)	4	30	32/0	0.30	104	0.88	10	0.99	1.7	0.85
F32T8/ES (28W)	4	28	32/0	0.29	102	0.88	10	0.99	1.7	0.86
F32T8/ES (25W)	4	25	32/0	0.25	85	0.88	15	0.99	1.7	1.04
F25T8 (25W)	4	25	0/-18	0.24	84	0.89	15	0.99	1.7	1.06
F17T8 (17W)	4	17	0/-18	0.18	62	0.91	15	0.98	1.7	1.47
F32T8 (32W)	3	32	0/-18	0.26	90	0.95	10	0.99	1.7	1.06
F32T8/ES (30W)	3	30	32/0	0.25	86	0.95	15	0.99	1.7	1.10
F32T8/ES (28W)	3	28	32/0	0.24	83	0.95	15	0.98	1.7	1.14
F32T8/ES (25W)	3	25	32/0	0.21	71	0.95	15	0.99	1.7	1.34
F25T8 (25W)	3	25	0/-18	0.21	72	0.96	15	0.99	1.7	1.33
F17T8 (17W)	3	17	0/-18	0.15	53	0.98	15	0.98	1.7	1.85

### WARRANTY:



Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C.  
 For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance.  
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.  
 March 9, 2015

## ORDERING INFORMATION

Order code: 61064  
 Description: E432T8PS347/N/AS/BULK  
 UPC: 69549610644

## WIRING DIAGRAM

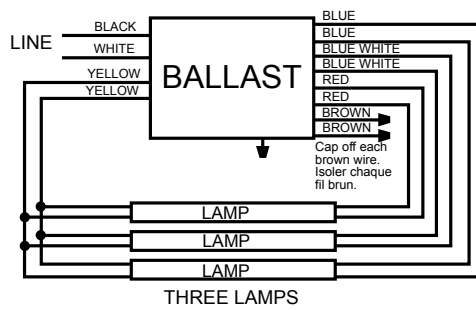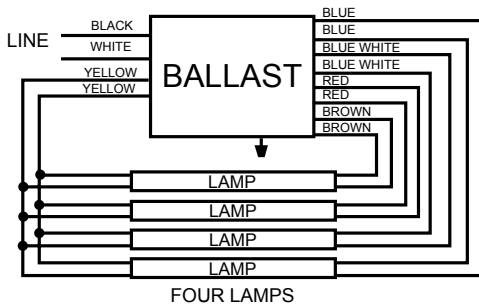


## LEADS LENGTH

Black	18.8" (48.0 cm)
White	18.8" (48.0 cm)
Blue	30.9" (78.5 cm)
Red	30.9" (78.5 cm)
Yellow	46.4" (118.0 cm)
Blue/White	30.9" (78.5 cm)
Brown	30.9" (78.5 cm)

## BALLAST DIMENSIONS

Length (L):	9.50" (24.10 cm)
Width (W):	1.70" (4.30 cm)
Height (H):	1.14" (2.90 cm)
Mounting (M):	8.91" (22.63 cm)

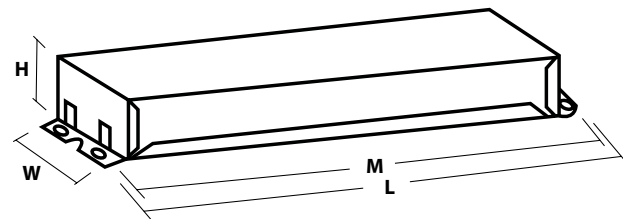

## WARRANTY:

Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C. For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. March 9, 2015