

EXST/SXST

Project:

Contractor:

STEEL

NRCAN C860 Registered

Steel Construction

LED 120/347VAC Input



Approvals:

CSA Certified to C22.2 #141.15 and C860



DESCRIPTION

The EXST/SXST series of commercial steel signs features a slim profile that eliminates light leaks combined with a simple, easy to install design. Available in AC only, AC/DC and internally self-powered versions.

CIRCUITRY - AC & AC/DC

- LED ultra bright light source
- 120/347VAC Input, field selectable
- 1.9W power consumption single or double face
- Emergency DC wattages as follows:
6VDC = 1.3W 12VDC = 1.7W 24VDC = 3.5W


CIRCUITRY - SELF-POWERED

- LED ultra bright light source
- 120/347VAC Input, field selectable
- 4W power consumption single or double face
- High-performance, sealed Ni-Cad battery
- 90 minutes emergency duration (standard)
 120 minutes emergency duration is optional
- Solid state transfer and battery charger

MECHANICAL

- 20 Gauge steel construction
- Slide out faceplates and backplates for rapid and simple installation
- Snap out directional chevrons/arrows
- Universal spider knockout pattern stamped into backplate for junction box mounting
- Universal models include ceiling or end mount, field installable canopy kit c/w spider plate
- Multiple conduit entry knockouts
- White powder coat finish standard, other finishes and colours optional

DIMENSIONS

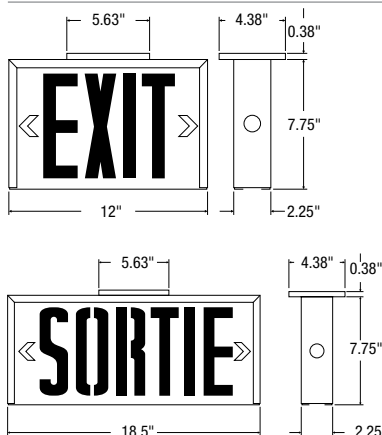

ORDERING GUIDE

Series	Nbr of faces	Mounting	Colour	DC Voltage	Options†
EXST - Exit SXST - Sortie	U - Universal faces 1 - Single face 2 - Double faces	M - Universal	WHT - White (standard) BLK - Black GRY - Grey CUS - Custom colour (specify)	UNVDC - Universal DC backup voltage 6, 12 or 24VDC selectable NDC - AC only BAT - Self-powered for 90 minutes BATX - Self-powered for 120 minutes	VDR, WRG*, LXG, SPW, K5

† For detailed options descriptions, please consult the options page.

* Specify mounting.