NTERMATIC®

PIR Occupancy/ Vacancy Sensor

dual load for 120V/277V



IOS-DDR-WH

Features:

- Two ON/OFF push buttons allow control of two loads independently
- No neutral required
- For use with electronic fluorescent ballasts
- Time delay OFF ranging from 15 seconds to 30 minutes
- Passive Infrared technology
- Adjustable sensitivity settings
- Standard decorator wall plate included
- ISO9001 Registered manufacturing facility
- UL/cUL Listed device
- Five Year Limited Warranty








Ideal for:
Offices, Copy Rooms,
Small Conference Rooms,
Break Rooms










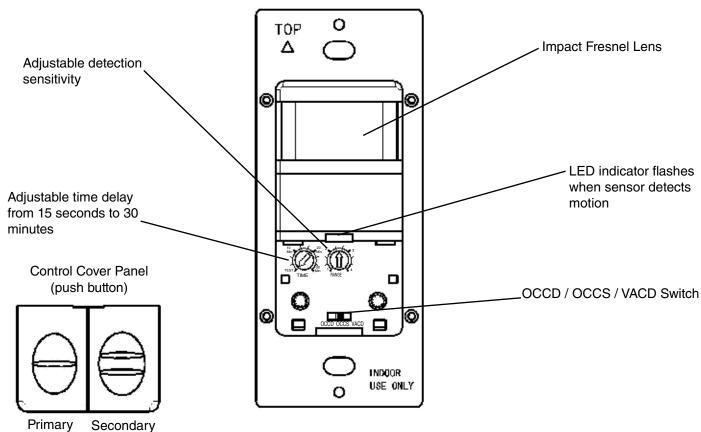

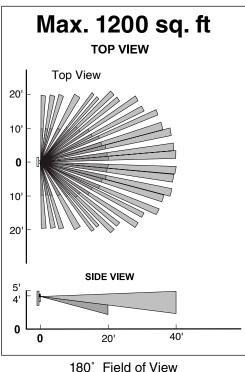

Load

Load

0°	Field	of	View

Part #	IOS-DDR			
Desc	Double Pole, Wall Switch PIR Occupancy/Vacancy Sensor Switch for 120V/277V			
Rating	Incandescent / Tungsten: 800W-120VAC Fluorescent / Ballast: 800VA-120VAC / 1600VA-277VAC Motor: 1/4HP-120VAC Time Delay: 15 Sec to 30 Min Light Level: 30 LuxDaylight Operation Temperature: 32°F131°F / 0-55°C No minimum Load required. For use with electronic fluorescent ballasts			
Coverage	180°, Max 1200 sq.ft			
Color	White			
Five Year Limited Warranty				

Model Ordering Info:

Series	Style	_	Type	 Finish
IOS	D		DR	WH
Intermatic Occupancy Sensor	Decorator Plate		Dual Relay	White