

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Step Light with Photocell

Model & Voltage	Color Temp & CRI	Lumens	Finish
<input type="radio"/> WL-LED102 120 VAC	<input type="radio"/> 3000K 90 <input type="radio"/> Amber	65 65	<input type="radio"/> BK Black on Aluminum <input type="radio"/> BN Brush Nickel on Aluminum <input type="radio"/> BZ Bronze on Aluminum <input type="radio"/> SS Stainless Steel <input type="radio"/> WT White on Aluminum

Example: **WL-LED102-30-BK**

FEATURES


- Options in die-cast brass or 316 marine-grade stainless steel
- Fits into 2"4" J-Box with minimum inside dimensions of 3"2"2"
- No driver needed
- No heat radiation
- Low profile, flush to wall aesthetics with no visible hardware
- Balanced lighting, free of shadows with minimum glare
- Integrated photocell for energy saving
- Driver concealed within the fixture
- 5 Year warranty

SPECIFICATIONS

Construction:	Corrosion resistant aluminum alloy, Stainless Steel
Power:	2W
Input:	120 VAC, 50/60Hz
Light Source:	Integrated LED 3 Step Mac Adam Ellipse
Lens:	Tempered Glass
Rated Life:	54000 Hours
Finish:	Enamel Coated Black on Aluminum, Enamel Coated Brush Nickel on Aluminum, Enamel Coated Bronze on Aluminum, Enamel Coated White on Aluminum, Stainless Steel Stainless Steel
Operating Temp:	-40°F to 122°F (-40°C to 50°C)
Standards:	ETL, cETL, Wet Location Listed, IP66, ADA



FINISHES

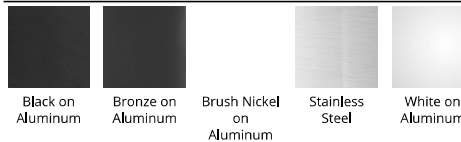

LINE DRAWING

