

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Step Light with Photocell

Model & Voltage	Color Temp & CRI	Lumens	Finish
<input type="radio"/> WL-LED102 120 VAC	<input type="radio"/> 3000K 90 <input type="radio"/> Amber	65 65	<input type="radio"/> BK Black on Aluminum <input type="radio"/> BN Brush Nickel on Aluminum <input type="radio"/> BZ Bronze on Aluminum <input type="radio"/> SS Stainless Steel <input type="radio"/> WT White on Aluminum

Example: **WL-LED102-30-BK**

### FEATURES


- Options in die-cast brass or 316 marine-grade stainless steel
- Fits into 2"4" J-Box with minimum inside dimensions of 3"2"2"
- No driver needed
- No heat radiation
- Low profile, flush to wall aesthetics with no visible hardware
- Balanced lighting, free of shadows with minimum glare
- Integrated photocell for energy saving
- Driver concealed within the fixture
- 5 Year warranty

### SPECIFICATIONS

<b>Construction:</b>	Corrosion resistant aluminum alloy, Stainless Steel
<b>Power:</b>	2W
<b>Input:</b>	120 VAC, 50/60Hz
<b>Light Source:</b>	Integrated LED 3 Step Mac Adam Ellipse
<b>Lens:</b>	Tempered Glass
<b>Rated Life:</b>	54000 Hours
<b>Finish:</b>	Enamel Coated Black on Aluminum, Enamel Coated Brush Nickel on Aluminum, Enamel Coated Bronze on Aluminum, Enamel Coated White on Aluminum, Stainless Steel Stainless Steel
<b>Operating Temp:</b>	-40°F to 122°F (-40°C to 50°C)
<b>Standards:</b>	ETL, cETL, Wet Location Listed, IP66, ADA



### FINISHES

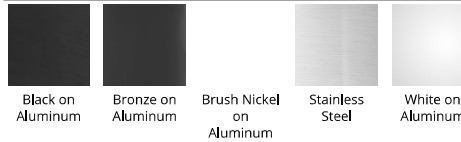

### LINE DRAWING

